


# K-VHRO IS OR MS NI

## Hexagon socket screw plugs with O-ring

**HANSA****FLEX**

### Properties

Operating temperature	Max. 80 °C (with O-ring, NBR)
Pressure	Max. 60 bar
Design	Blanking screw with hexagon socket
Material	Nickel-plated brass

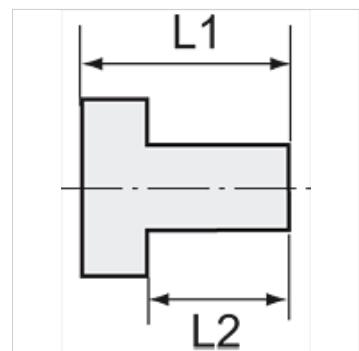

### Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Further information on request

### Description

Suitable for air, water, oil, steam, etc.

### Additional information

Further types and dimensions on request.

Item	Identification	Thread	hexagon socket (mm)	L1 (mm)	L2 (mm)
K-07 40 39 91		M 5	2,5	6,5	4,0
K-07 40 39 92		G 1/8	3,0	9,5	7,0
K-07 40 39 93		G 1/4	6,0	11,0	8,0
K-07 40 39 94		G 3/8	8,0	12,5	9,0
K-07 40 39 95		G 1/2	10,0	14,5	11,0
K-07 40 44 09		G 3/4	17,0	20,0	15,5
K-07 40 44 10		G 1	19,0	21,0	16,0