

# K-VHR IS BUND ES

Hexagon socket screw plugs with collar



**HANSA FLEX**

## Properties

**Working pressure** Max. 20 bar

**Design** Blanking screw with hexagon socket

**Material** Stainless steel 1.4571

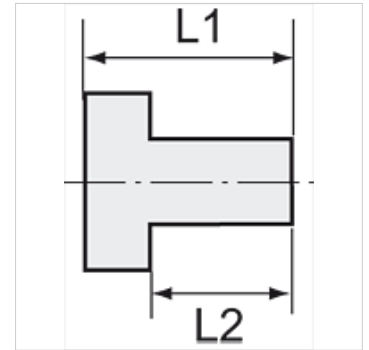

## Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Further information on request

## Additional information

Further types and dimensions on request.

## Item

| Identification | Thread | L1<br>(mm) | L2<br>(mm) | AF    |
|----------------|--------|------------|------------|-------|
| K- 07 40 39 65 | G 1/8  | 11,0       | 8,0        | 5 mm  |
| K- 07 40 39 66 | G 1/4  | 13,0       | 10,0       | 6 mm  |
| K- 07 40 39 67 | G 3/8  | 15,0       | 12,0       | 8 mm  |
| K- 07 40 39 68 | G 1/2  | 18,0       | 14,0       | 10 mm |
| K- 07 40 45 22 | G 3/4  | 20,0       | 16,0       | 12 mm |
| K- 07 40 45 25 | G 1    | 21,0       | 16,0       | 17 mm |