


Properties

| | |
|------------------|-----------------------------------|
| Working pressure | Max. 20 bar |
| Design | Blanking screw, with hexagon head |
| Material | Stainless steel 1.4571 |

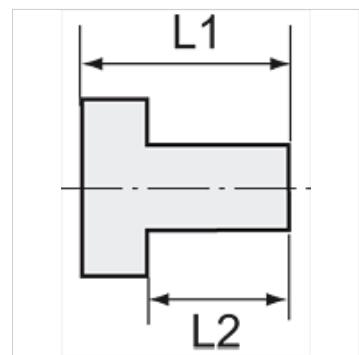

Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Additional information

Further types and dimensions on request.

Item

| Identification | Thread | L1 (mm) | L2 (mm) | AF |
|----------------|--------|------------|------------|-------|
| K-07 40 39 69 | G 1/8 | 11,0 | 6,0 | 13 mm |
| K-07 40 39 70 | G 1/4 | 13,0 | 8,0 | 17 mm |
| K-07 40 39 71 | G 3/8 | 14,0 | 8,0 | 19 mm |
| K-07 40 39 72 | G 1/2 | 16,0 | 10,0 | 24 mm |
| K-07 40 45 28 | G 3/4 | 16,0 | 11,0 | 30 mm |
| K-07 40 44 43 | G 1 | 19,0 | 13,0 | 38 mm |