

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

Properties

Temp. range	-20 °C to +60 °C
Pressure	Max. 12 bar
Pressure range	Max. 12 bar
Temperature	-20 °C to +60 °C
Flow rate	0 - 400 l/min
Spring	Stainless-steel
Housing	Brass



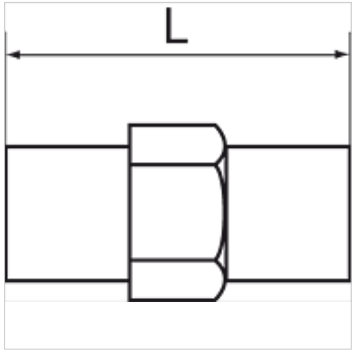

Note

Further information on request

Description

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Item

Identification	Thread	Working pressure (preset)	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.