



# K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

**HANSA FLEX**

## Properties

Temp. range	-20 °C to +60 °C
Pressure	Max. 12 bar
Pressure range	Max. 12 bar
Temperature	-20 °C to +60 °C
Flow rate	0 - 400 l/min
Spring	Stainless-steel
Housing	Brass

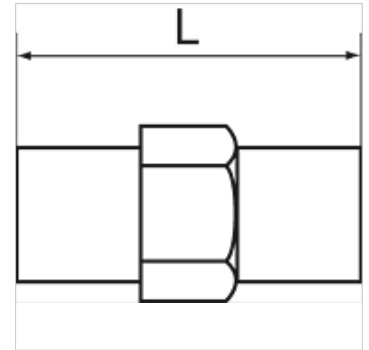

## Note

Further information on request

## Description

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

## Item

Identification	Thread	Working pressure (preset)	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0