


# K-S-BKR O ENTL ABSCHL

## Safety ball valves, lockable, without relief port

**HANSA****FLEX**

### Properties

|                    |   |
|--------------------|---|
| Thread description | Rp thread acc. to EN 10226  |
| Temperature        | -40 ° C up to max. +170 ° C; Warning: The freezing fluid in the system may damage the valve difficult |
| Housing            | Nickel-plated brass   |
| Hand lever         | Steel - PVC coated  |
| Ball seals         | PTFE  |
| Stem seal          | PTFE  |

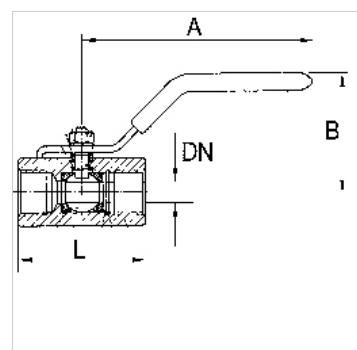

### Note

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

Further information on request

### Description

2/2-way safety ball valves made of nickel-plated brass. Specially designed for pneumatic applications. The ball valve can be locked manually. Full bore, heavy-duty type.

### Additional information

The price does not include a padlock. Please order separately.

### Item

| Identification | DN | Thread   | PN (bar) | A<br>(mm) | B<br>(mm) | L<br>(mm) |
|----------------|----|----------|----------|-----------|-----------|-----------|
| K-07 30 21 29  | 8  | Rp 1/4   | 65       | 82,0      | 39,5      | 51,0      |
| K-07 30 21 30  | 10 | Rp 3/8   | 65       | 82,0      | 39,5      | 51,0      |
| K-07 30 21 31  | 15 | Rp 1/2   | 65       | 100,0     | 43,0      | 61,0      |
| K-07 30 21 32  | 20 | Rp 3/4   | 40       | 120,0     | 52,5      | 74,5      |
| K-07 30 21 33  | 25 | Rp 1     | 40       | 120,0     | 57,0      | 90,5      |
| K-07 30 21 34  | 32 | Rp 1 1/4 | 30       | 158,0     | 78,0      | 104,0     |
| K-07 30 21 35  | 40 | Rp 1 1/2 | 30       | 158,0     | 85,0      | 117,0     |
| K-07 30 21 36  | 50 | Rp 2     | 30       | 158,0     | 92,0      | 135,0     |

### Accessories

K-VORHAENGESCHLOSS Padlock