


K-S-BKR M ENTL ABSCHL

Safety ball valves lockable, with relief port

HANSA**FLEX**

Properties

| | |
|-----------------------|------------------------------|
| Operating pressure | Max. 10 bar |
| Operating temperature | -20 °C to max. +100 °C |
| Relief port | M 5 |
| Thread description | Rp thread acc. to ISO 7-1 |
| Hand lever | Stainless steel - PVC coated |
| Ball seals | PTFE / NBR |
| Stem seal | PTFE |
| Material | Stainless steel |

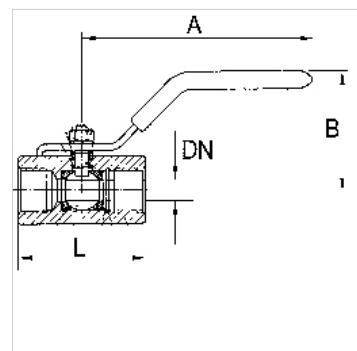

Note

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

Further information on request

Description

2/2-way stainless steel safety ball valves. Specially designed for pneumatic applications. The ball valve can be locked manually and has a relief port.

Additional information

The price does not include a padlock. Please order separately.

Item

| Identification | DN | Thread | A (mm) | B (mm) | L (mm) |
|----------------|----|----------|-----------|-----------|-----------|
| K-07 30 15 16 | 8 | Rp 1/4 | 100,0 | 50,0 | 55,0 |
| K-07 30 15 17 | 10 | Rp 3/8 | 100,0 | 50,0 | 55,0 |
| K-07 30 15 18 | 15 | Rp 1/2 | 130,0 | 60,0 | 65,0 |
| K-07 30 15 19 | 20 | Rp 3/4 | 130,0 | 64,0 | 74,6 |
| K-07 30 15 20 | 25 | Rp 1 | 165,0 | 71,0 | 88,0 |
| K-07 30 15 21 | 32 | Rp 1 1/4 | 165,0 | 78,0 | 102,0 |
| K-07 30 15 22 | 40 | Rp 1 1/2 | 190,0 | 86,0 | 110,0 |
| K-07 30 15 23 | 50 | Rp 2 | 190,0 | 95,0 | 125,0 |

Accessories

K-VORHAENGESCHLOSS Padlock