
K-BKR MINI SAFETY

Mini safety ball valves, non-lockable, with relief port - SAFETY

Properties

Operating pressure	0.99 - 20 bar
Operating temperature	-20 °C to max. +80 °C
Relief port	2,5
Thread description	G thread acc. DIN EN ISO 228-1
Hand lever	PA 66
Ball seals	PTFE
Stem seal	NBR
Material	Nickel-plated brass



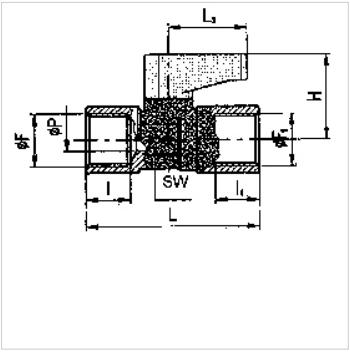

Note

Further information on request

Item

Identification	DN	Thread	H (mm)	L (mm)	L1 (mm)	AF (mm)
K- 07 30 20 10	6	G 1/8 female	21,0	35,0	19,0	14
K- 07 30 20 11	6	G 1/4 female	21,0	37,0	19,0	14
K- 07 30 20 12	8	G 3/8 female	21,0	42,0	19,0	18

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.