


K-WTST SAFETY BK SCHA AN HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and 2-piece service unit

HANSA FLEX

Properties

| | |
|--------------------------------------|---|
| Input pressure | 2.5 - 16 bar |
| Output pressure | 0.5 - 8 bar |
| Temp. range | -10 °C to +50 °C |
| Media | Compressed air |
| Sealant | NBR |
| Connection thread | Material: Die-cast zinc |
| Container | Polycarbonate (with bayonet lock) and bowl guard |
| Filter element | Cellpor (PE) 5 µm |
| Housing | Material: Grivory® (PA 66) |
| Diaphragm | NBR |
| Internal air consumption | Max. 1.5 l/min (depending on secondary pressure) |
| Flow rate measurement | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |
| connection venting ball valve | Silencer |

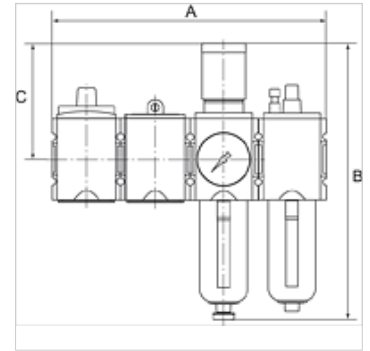

Note

Further information on request

Description

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

Ordering information

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

Item

| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | condensate outlet |
|----------------|--------|-------------------|--------|----------|--------|-------------------|
| K- 07 25 15 38 | G 1/4 | 1750 | 208,0 | 225.0 mm | 95,5 | Semi |
| K- 07 25 15 39 | G 3/8 | 1750 | 208,0 | 225.0 mm | 95,5 | Semi |
| K- 07 25 15 40 | G 3/8 | 3500 | 252,0 | 257.0 mm | 110,0 | Semi |
| K- 07 25 15 41 | G 1/2 | 3500 | 252,0 | 257.0 mm | 110,0 | Semi |
| K- 07 25 15 42 | G 3/4 | 10000 | 340,0 | 329.0 mm | 137,0 | Semi |
| K- 07 25 15 43 | G 1 | 10000 | 340,0 | 329.0 mm | 137,0 | Semi |
| K- 07 25 15 44 | G 1/4 | 1750 | 208,0 | 243.0 mm | 95,5 | Auto |
| K- 07 25 15 45 | G 3/8 | 1750 | 208,0 | 243.0 mm | 95,5 | Auto |
| K- 07 25 15 46 | G 3/8 | 3500 | 252,0 | 274.0 mm | 110,0 | Auto |
| K- 07 25 15 47 | G 1/2 | 3500 | 252,0 | 274.0 mm | 110,0 | Auto |
| K- 07 25 15 48 | G 3/4 | 10000 | 340,0 | 343.0 mm | 137,0 | Auto |
| K- 07 25 15 49 | G 1 | 10000 | 340,0 | 343.0 mm | 137,0 | Auto |

Accessories

| | |
|--------------------|----------|
| K-STECKSCHLOSS | Key lock |
| K-VORHAENGESCHLOSS | Padlock |