


# K-WTST SAFETY BKR SCHA AN DR MULTI

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and pressure regulator with lock cylinder

**HANSA FLEX**

## Properties

<b>Input pressure</b>	2 - 16 bar
<b>Output pressure</b>	0.5 - 10 bar
<b>Temp. range</b>	Max. 60 °C
<b>Media</b>	Compressed air
<b>Sealant</b>	NBR
<b>Container</b>	Polycarbonate (with bayonet lock) and bowl guard
<b>Spring bonnet</b>	POM
<b>Filter element</b>	Cellpor (PE) 5 µm
<b>Housing</b>	Die-cast zinc
<b>Diaphragm</b>	NBR
<b>Drain valve</b>	Semi-automatic
<b>Flow rate measurement</b>	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar
<b>More information</b>	see data sheets of the individual components (on request)
<b>connection venting ball valve</b>	Silencer

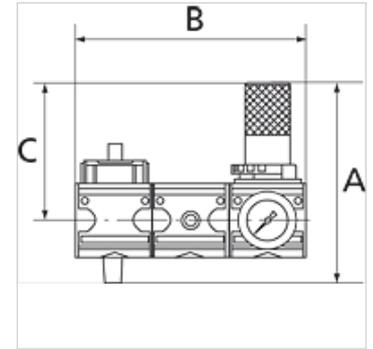

## Description

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Ordering information

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

Item	Identification	Thread	Control range	Flow rate (L/min)	A (mm)	B	C (mm)
	K- 07 25 15 11	G 1/4	2 - 10 bar	1000	128,0	137.8 mm	94,0
	K- 07 25 15 12	G 1/2	2 - 10 bar	4000	189,0	200.8 mm	122,0
	K- 07 25 15 13	G 1	2 - 10 bar	12000	241,7	282.8 mm	157,0