


K-WTST SAFETY BKR SCHA AN FILR MULT

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and filter regulator with lock cylinder

HANSA FLEX

Properties

| | |
|-------------------------------|--|
| Input pressure | 2 - 16 bar |
| Output pressure | 0.5 - 10 bar |
| Temp. range | Max. 60 °C |
| Media | Compressed air |
| Sealant | NBR |
| Container | Polycarbonate (with bayonet lock) and bowl guard |
| Spring bonnet | POM |
| Filter element | Cellpor (PE) 5 µm |
| Housing | Die-cast zinc |
| Diaphragm | NBR |
| Drain valve | Semi-automatic |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| More information | see data sheets of the individual components (on request) |
| connection venting ball valve | Silencer |

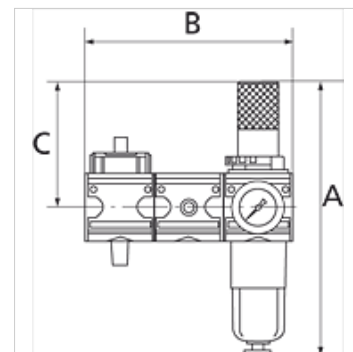

Description

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

Ordering information

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

| Item | | | | | | |
|----------------|--------|-------------------|--------|----------|--------|-------------------|
| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | condensate outlet |
| K- 07 25 15 14 | G 1/4 | 1000 | 219,1 | 137.8 mm | 94,0 | Semi-automatic |
| K- 07 25 15 15 | G 1/2 | 4000 | 269,3 | 200.8 mm | 122,0 | Semi-automatic |
| K- 07 25 15 16 | G 1 | 12000 | 410,8 | 282.8 mm | 157,0 | Semi-automatic |