
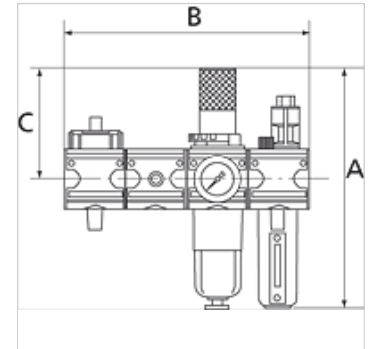


# K-WTST SAFETY BKR SCHA AN 2T MULTI

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and 2-piece service unit with lock cylinder

**HANSA FLEX**

| Properties                    |  |
|-------------------------------|--|
| Input pressure                | 2 - 16 bar   |
| Output pressure               | 0.5 - 10 bar   |
| Temp. range                   | Max. 60 °C   |
| Media                         | Compressed air   |
| Sealant                       | NBR  |
| Container                     | Polycarbonate (with bayonet lock) and bowl guard               |
| Spring bonnet                 | POM  |
| Filter element                | Cellpor (PE) 5 µm  |
| Housing                       | Die-cast zinc  |
| Diaphragm                     | NBR  |
| Drain valve                   | Semi-automatic   |
| Flow rate measurement         | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| More information              | see data sheets of the individual components (on request)      |
| connection venting ball valve | Silencer   |



## Description

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Ordering information

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

| Item           |        |                   |        |          |        |                   |
|----------------|--------|-------------------|--------|----------|--------|-------------------|
| Identification | Thread | Flow rate (L/min) | A (mm) | B        | C (mm) | condensate outlet |
| K- 07 25 15 17 | G 1/4  | 1000              | 219,1  | 182.8 mm | 94,0   | Semi-automatic    |
| K- 07 25 15 18 | G 1/2  | 3550              | 269,3  | 266.8 mm | 122,0  | Semi-automatic    |
| K- 07 25 15 19 | G 1    | 9800              | 410,8  | 382.8 mm | 157,0  | Semi-automatic    |