
K-WTST SAFETY BKR SCHA AN 2T MULTI

SAFETY service unit sets, comprising a ball valve with silencer, startup valve and 2-piece service unit with lock cylinder



Properties			
Input pressure	2 - 16 bar		
Output pressure	0.5 - 10 bar		
Temp. range	Max. 60 °C		
Media	Compressed air		
Sealant	NBR		
Container	Polycarbonate (with bayonet lock) and bowl guard		
Spring bonnet	POM		
Filter element	Cellpor (PE) 5 µm		
Housing	Die-cast zinc		
Diaphragm	NBR		
Drain valve	Semi-automatic		
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar		
More information	see data sheets of the individual components (on request)		
connection venting ball valve	Silencer		

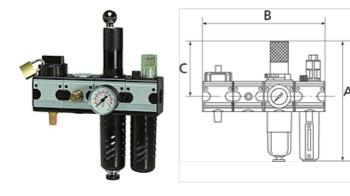

Description

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

Ordering information

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

Item						
Identification	Thread	Flow rate (L/min)	A (mm)	В	C (mm)	condensate outlet
K- 07 25 15 17	G 1/4	1000	219,1	182.8 mm	94,0	Semi-automatic
K- 07 25 15 18	G 1/2	3550	269,3	266.8 mm	122,0	Semi-automatic
K- 07 25 15 19	G 1	9800	410,8	382.8 mm	157,0	Semi-automatic