

K-SCHALLDAE SINTERBR AG 569

Silencers, sintered bronze, flat type with male thread, 569 Series


HANSA FLEX

Properties

Operating pressure 0 - 8 bar

Operating temperature -10 °C to +250 °C

sound level 6bar 71 ~ 108 dB(A)

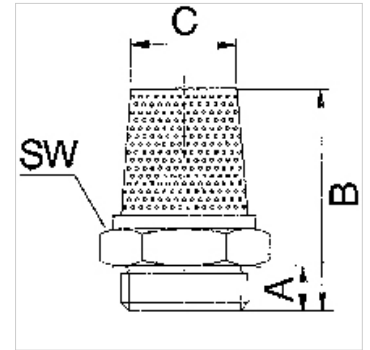

Note

Further information on request

Description

For reducing the exhaust noise generated by pneumatic equipment.

Item

| Identification | Thread | A (mm) | B (mm) | C (mm) | AF |
|----------------|--------|-----------|-----------|-----------|-------|
| K- 07 40 34 93 | M 5 | 4,0 | 8,0 | 7,8 | 8 mm |
| K- 07 40 34 94 | G 1/8 | 6,0 | 13,0 | 12,8 | 13 mm |
| K- 07 40 34 95 | G 1/4 | 7,5 | 16,5 | 14,8 | 15 mm |
| K- 07 40 34 96 | G 3/8 | 7,5 | 16,5 | 18,8 | 19 mm |
| K- 07 40 34 97 | G 1/2 | 9,0 | 18,5 | 23,0 | 24 mm |
| K- 07 40 46 97 | G 3/4 | 11,0 | 19,5 | 26,0 | 27 mm |
| K- 07 40 46 98 | G 1 | 14,0 | 24,0 | 35,0 | 36 mm |