K-SCHALLDAE SINTERBR SCHLITZ


Silencers, sintered bronze, slotted

HANSA-FLEX

Properties

Operating pressure	0 - 8 bar
Operating temperature	-10 °C to +250 °C
sound level 6bar	71 ~ 108 dB(A)



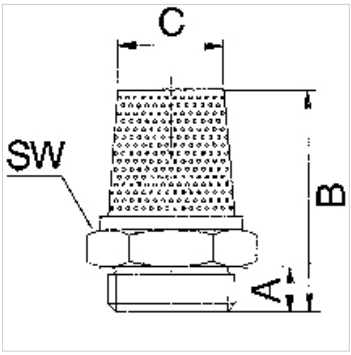

Note

Further information on request

Description

For reducing the exhaust noise generated by pneumatic equipment.

Item

Identification	Thread	A (mm)	B (mm)	C (mm)
K- 07 40 34 83	G 1/8	5,5	21,0	8,0
K- 07 40 34 84	G 1/4	8,5	27,0	10,0
K- 07 40 34 85	G 3/8	11,0	36,0	15,0
K- 07 40 34 86	G 1/2	11,0	44,0	19,0
K- 07 40 46 95	G 3/4	12,0	65,0	20,0
K- 07 40 46 96	G 1	15,0	75,0	26,5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.