


K-MV G (NC) D 230 V, 50 HZ STA

Normally closed, (NC), directly operated, 230 V, 50 Hz, standard type



| Properties | |
|-----------------------|---|
| Electrical connection | device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket |
| Protection IP | IP 65 |
| Media temperature | max. 80 °C when using water or oils; max. 90 °C when using with air |
| Thread description | G thread acc. DIN EN ISO 228-1 |
| Housing, valve seat | Brass |
| Internal parts | Stainless steel |
| Seal | FPM |

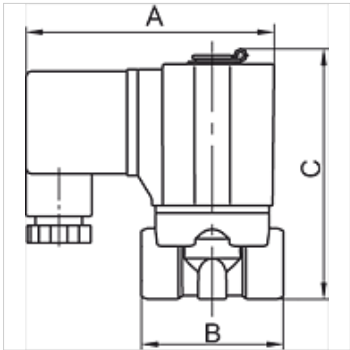

Note
Further information on request

Description
Standard series in two different versions: Directly operated, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

| Item | | | | | | | |
|----------------|--------|--------------------------------|-----|-----------|-----------|-----------|------|
| Identification | Thread | Max. working pressure (bar) | DN | A (mm) | B (mm) | C (mm) | Type |
| K- 07 30 01 56 | G 1/8 | 10 | 3,0 | 70,0 | 40,0 | 70,7 | 1 |
| K- 07 30 01 57 | G 1/4 | 10 | 3,0 | 70,0 | 40,0 | 70,7 | 1 |
| K- 07 30 01 58 | G 3/8 | 10 | 5,0 | 85,0 | 52,0 | 87,0 | 1 |
| K- 07 30 01 59 | G 1/2 | 10 | 5,0 | 85,0 | 52,0 | 87,0 | 1 |