


# K-MV O (NO) V 24 V DC

Normally open, (NO), pilot-operated, 24 V DC



| Properties            |   |
|-----------------------|---|
| Electrical connection | device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket |
| Thread description    | G thread acc. DIN EN ISO 228-1  |
| Media temperature     | max. 80 °C when using water or oils; max. 90 °C when using with air   |
| Protection IP         | IP 65   |
| Max. working pressure | 7 bar   |
| Sealant               | FPM   |
| Housing, valve seat   | Stainless steel 1.4301  |
| Internal parts        | Stainless steel   |

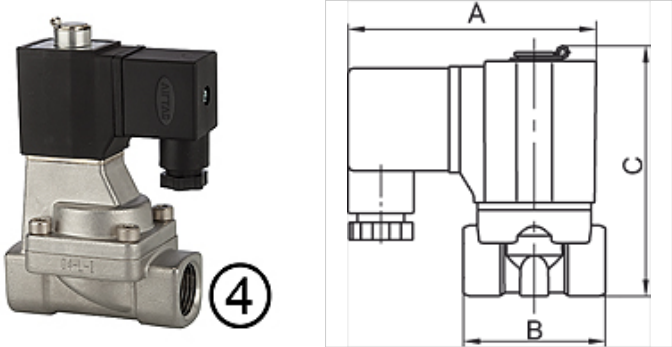

**Note**  
Further information on request

**Description**  
Standard series in two different versions: Directly operated, Pilot-operated

| Item           |                             |        |      |        |        |        |      |
|----------------|-----------------------------|--------|------|--------|--------|--------|------|
| Identification | min. working pressure (bar) | Thread | DN   | A (mm) | B (mm) | C (mm) | Type |
| K- 07 30 01 53 | 0,50                        | G 1/2  | 15,0 | 70,0   | 70,0   | 112,3  | 4    |
| K- 07 30 01 54 | 0,50                        | G 3/4  | 20,0 | 70,0   | 82,0   | 120,8  | 4    |
| K- 07 30 01 55 | 0,50                        | G 1    | 25,0 | 70,0   | 92,0   | 129,3  | 4    |