
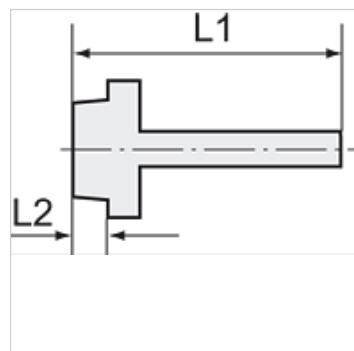


### Properties

Operating temperature	Max. 150 °C
Pressure	Max. 60 bar
Material	Nickel-plated brass

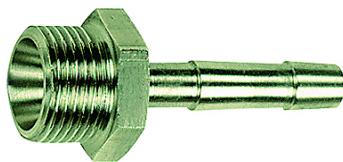

### Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Further information on request

### Description

Suitable for air, water, oil, steam, etc.

### Additional information

Further types and dimensions on request.

Item	Identification	Thread	for hose	L1 (mm)	L2 (mm)	AF
K-07 40 49 72		G 1/8	LW 6 mm	36,0	7,0	14 mm
K-07 40 49 73		G 1/8	LW 8 mm	36,0	7,0	14 mm
K-07 40 49 74		G 1/8	LW 9 mm	36,0	7,0	14 mm
K-07 40 49 15		G 1/4	LW 4 mm	36,0	9,0	17 mm
K-07 40 49 18		G 1/4	LW 6 mm	39,0	9,0	17 mm
K-07 40 49 19		G 1/4	LW 8 mm	39,0	9,0	17 mm
K-07 40 49 23		G 1/4	LW 9 mm	39,0	9,0	17 mm
K-07 40 49 24		G 1/4	LW 10 mm	39,0	9,0	17 mm
K-07 40 49 25		G 1/4	LW 13 mm	42,0	9,0	17 mm
K-07 40 49 28		G 3/8	LW 8 mm	39,0	9,0	19 mm
K-07 40 49 32		G 3/8	LW 9 mm	39,0	9,0	19 mm
K-07 40 49 33		G 3/8	LW 10 mm	39,0	9,0	19 mm
K-07 40 49 35		G 3/8	LW 13 mm	42,0	9,0	19 mm
K-07 40 49 38		G 1/2	LW 8 mm	42,0	11,0	24 mm
K-07 40 49 41		G 1/2	LW 9 mm	42,0	11,0	24 mm
K-07 40 49 42		G 1/2	LW 10 mm	42,0	11,0	24 mm
K-07 40 49 47		G 1/2	LW 13 mm	45,0	11,0	24 mm
K-07 40 49 48		G 1/2	LW 16 mm	53,0	11,0	24 mm
K-07 40 49 49		G 1/2	LW 19 mm	53,0	11,0	24 mm
K-07 40 49 50		G 3/4	LW 13 mm	51,0	12,0	32 mm
K-07 40 49 51		G 3/4	LW 16 mm	51,0	12,0	32 mm
K-07 40 49 53		G 3/4	LW 19 mm	54,0	12,0	32 mm
K-07 40 49 55		G 3/4	LW 25 mm	54,0	12,0	32 mm
K-07 40 49 60		G 1	LW 25 mm	49,0	15,0	34 mm
K-07 40 49 68		G 1	LW 32 mm	55,0	13,0	38 mm