

K-L-STECK VB MINI

Union elbows, mini

HANSA FLEX

Properties

Working pressure Max. 10 bar, vacuum

Application Air, vacuum


Recommended hoses PU or PA (nylon)

Media Compressed air

Temp. range 0 °C to +60 °C

Material Plastic, Nickel plated brass

Contact pressure ring Plastic

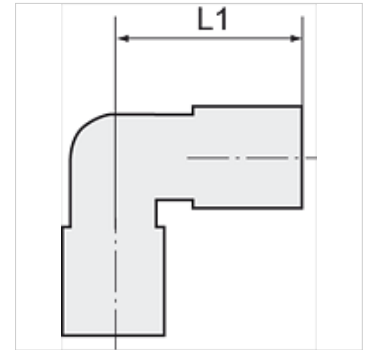

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

Item

Identification	for external hose \varnothing	L1 (mm)
K- 07 40 23 84	3 mm	12,0
K- 07 40 23 85	4 mm	14,5
K- 07 40 23 86	6 mm	16,0