


K-FI REGL PC-BEHÄLTER S H HW G

Filter regulators with polycarbonate bowl, bowl guard and »HW« mounting bracket, semi-automatic drain valve

HANSA FLEX

Properties

| | |
|------------------------------------|--|
| Input pressure | Max. 10 bar |
| Media temperature | max. 70 °C |
| Ambient temperature | Max. 70 °C |
| Pore size in filter element | 5 µm |
| Sealant | NBR |
| Spring bonnet | POM |
| Housing | Die-cast aluminium |
| Drain valve | Semi- or fully-automatic |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| More information | User manual on request |

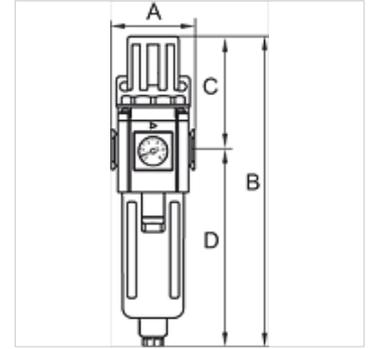

Item

| Identification | Thread | Control range | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | Size |
|----------------|--------|---------------|-------------------|--------|----------|--------|--------|------|
| K- 07 25 06 95 | G 1/4 | 1.5 - 9 bar | 1450 | 51,0 | 225.5 mm | 82,5 | 143,0 | 300 |
| K- 07 25 06 97 | G 3/8 | 1.5 - 9 bar | 1750 | 51,0 | 225.5 mm | 82,5 | 143,0 | 300 |
| K- 07 25 06 99 | G 1/2 | 1.5 - 9 bar | 1750 | 51,0 | 225.5 mm | 82,5 | 143,0 | 300 |
| K- 07 25 07 01 | G 3/8 | 1.5 - 9 bar | 3750 | 68,0 | 270.5 mm | 104,0 | 166,5 | 400 |
| K- 07 25 07 03 | G 1/2 | 1.5 - 9 bar | 3750 | 68,0 | 270.5 mm | 104,0 | 166,5 | 400 |

Accessories

| | |
|------------------------------------|---|
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-ERSATZMEMBRANE | Replacement diaphragm |
| K-ADAPTERPLATTEN HANSA | Adapter plate HANSA |
| K-ERSATZBEHÄLTER G UND G-MINI POLY | Spare tanks »G« Series and »G-mini« Series Polycarbonat |
| K-SCHUTZKORB G | Protective cage |
| K-FILTERELEMENT | Filter element |
| K-HALTERBAUSATZ | Holder |
| K-VERBINDUNGSELEMENTE | Connecting sets |
| K-WANDHALTER | Wall bracket |