K-3/2 ABSPERRVENTILE HW SCHL G-MINI


3/2-way shut-off valve

HANSA-FLEX

Properties

Input pressure	0 - 9 bar
Media temperature	max. 70 °C
Ambient temperature	Max. 70 °C
Vent port	G 1/4
Sealant	NBR
Housing	Die-cast aluminium
Toggle	Plastic
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
More information	User manual on request



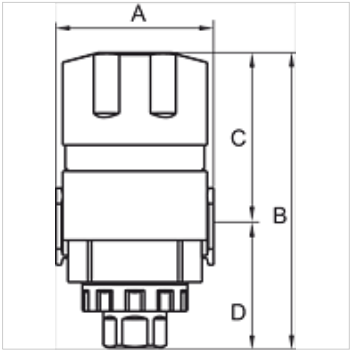

Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	Size
K- 07 25 12 29	G 1/8	1750	38,0	89,0 mm	52,5	36,5	200
K- 07 25 12 30	G 1/4	1750	38,0	89,0 mm	52,5	36,5	200

Accessories

K-VERBINDUNGELEMENTE	Connecting sets
K-WANDHALTER	Wall bracket
K-HALTERBAUSATZ	Holder

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.