
# K-TR AG-K


Male hose fittings with conical male thread

HANSA-FLEX

## Properties

| | |
|---|---|
| **Working pressure** | Max. 20 bar |
| **Material** | Stainless steel 1.4571 |



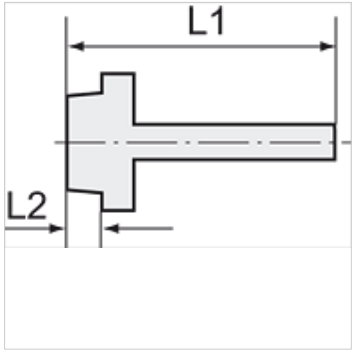


## Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

## Additional information

Further types and dimensions on request.

## Item

| Identification | Thread | for hose | L1 (mm) | L2 (mm) | AF |
|---|---|---|---|---|---|
| **K- 07 40 49 22** | R 1/4 | LW 9 mm | 39,7 | 9,7 | 17 mm |
| **K- 07 40 49 31** | R 3/8 | LW 9 mm | 40,1 | 10,1 | 19 mm |
| **K- 07 40 49 34** | R 3/8 | LW 13 mm | 43,1 | 10,1 | 19 mm |
| **K- 07 40 49 45** | R 1/2 | LW 13 mm | 47,2 | 13,2 | 24 mm |
| **K- 07 40 49 46** | R 1/2 | LW 19 mm | 55,2 | 13,2 | 24 mm |
| **K- 07 40 49 52** | R 3/4 | LW 19 mm | 56,2 | 14,5 | 32 mm |
| **K- 07 40 49 59** | R 1 | LW 25 mm | 58,8 | 16,8 | 38 mm |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*