


# K-WV 5/2 MANU K DREHHEB SCHALT M5

5/2-way valve, manually operated, with short wing lever, monostable, for panel mounting

**HANSA FLEX**

## Properties

Operating pressure	0 - 10 bar
Temp. range	-20 °C to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
Valve body	Aluminium alloy

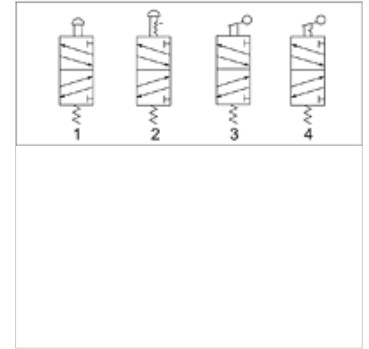

## Note

Further information on request

## Item

Identification	Connection	Vent port	Flow rate (L/min)	switching lever color	circuit diagram number
K- 07 15 03 02	G 1/8	G 1/8	450	Black	3
K- 07 15 03 03	G 1/8	G 1/8	450	Red	3
K- 07 15 03 04	G 1/8	G 1/8	450	green	3
K- 07 15 03 05	G 1/4	G 1/8	550	Black	3
K- 07 15 03 06	G 1/4	G 1/8	550	Red	3
K- 07 15 03 07	G 1/4	G 1/8	550	green	3