
K-WV 5/2 ELEKTROPNEU MONOSTABIL 4V

5/2-way pilot valve, monostable

Properties

Operating pressure	1.5 - 8 bar
Temp. range	-20 °C to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
Electrical connection	Connector Type B acc. to ISO 4400
min. working pressure	1,5 bar
Protection IP	IP 65
Valve body	Aluminium alloy



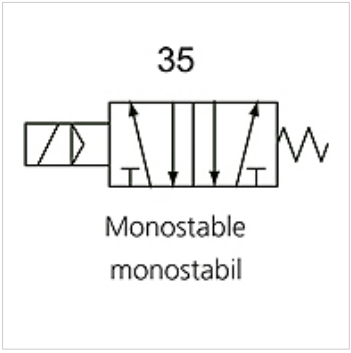

Note

Further information on request

Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number	Voltage	Control	Size
K- 07 15 02 47	M 5	M 5	300	35	24 V DC		100
K- 07 15 02 48	G 1/8	G 1/8	500	35	24 V DC		100
K- 07 15 02 49	G 1/8	G 1/8	750	35	24 V DC		200
K- 07 15 02 50	G 1/4	G 1/8	850	35	24 V DC		200
K- 07 15 02 51	G 1/4	G 1/4	1300	35	24 V DC		300
K- 07 15 02 52	G 3/8	G 1/4	1500	35	24 V DC		300
K- 07 15 02 53	G 1/2"	G 1/2	2000	35	24 V DC		400
K- 07 15 02 54	M 5	M 5	300	35	230 V, 50 Hz		100
K- 07 15 02 55	G 1/8	G 1/8	500	35	230 V, 50 Hz		100
K- 07 15 02 56	G 1/8	G 1/8	750	35	230 V, 50 Hz		200
K- 07 15 02 57	G 1/4	G 1/8	850	35	230 V, 50 Hz		200
K- 07 15 02 58	G 1/4	G 1/4	1300	35	230 V, 50 Hz		300
K- 07 15 02 59	G 3/8	G 1/4	1500	35	230 V, 50 Hz		300
K- 07 15 02 60	G 1/2"	G 1/2	2000	35	230 V, 50 Hz		400

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.