# K-WV 5/2 ELEKTROPNEU MONOSTABIL 4V

5/2-way pilot valve, monostable

## Properties

| | |
|---|---|
| **Operating pressure** | 1.5 - 8 bar |
| **Temp. range** | -20 °C to +70 °C |
| **Flow rate measurement** | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| **Electrical connection** | Connector Type B acc. to ISO 4400 |
| **min. working pressure** | 1,5 bar |
| **Protection IP** | IP 65 |
| **Valve body** | Aluminium alloy |




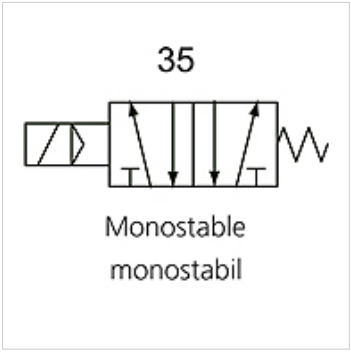


## Note

Further information on request

## Item

| Identification | Connection | Vent port | Flow rate (L/min) | circuit diagram number | Voltage | Control | Size |
|---|---|---|---|---|---|---|---|
| **K- 07 15 02 47** | M 5 | M 5 | 300 | 35 | 24 V DC | | 100 |
| **K- 07 15 02 48** | G 1/8 | G 1/8 | 500 | 35 | 24 V DC | | 100 |
| **K- 07 15 02 49** | G 1/8 | G 1/8 | 750 | 35 | 24 V DC | | 200 |
| **K- 07 15 02 50** | G 1/4 | G 1/8 | 850 | 35 | 24 V DC | | 200 |
| **K- 07 15 02 51** | G 1/4 | G 1/4 | 1300 | 35 | 24 V DC | | 300 |
| **K- 07 15 02 52** | G 3/8 | G 1/4 | 1500 | 35 | 24 V DC | | 300 |
| **K- 07 15 02 53** | G 1/2" | G 1/2 | 2000 | 35 | 24 V DC | | 400 |
| **K- 07 15 02 54** | M 5 | M 5 | 300 | 35 | 230 V, 50 Hz | | 100 |
| **K- 07 15 02 55** | G 1/8 | G 1/8 | 500 | 35 | 230 V, 50 Hz | | 100 |
| **K- 07 15 02 56** | G 1/8 | G 1/8 | 750 | 35 | 230 V, 50 Hz | | 200 |
| **K- 07 15 02 57** | G 1/4 | G 1/8 | 850 | 35 | 230 V, 50 Hz | | 200 |
| **K- 07 15 02 58** | G 1/4 | G 1/4 | 1300 | 35 | 230 V, 50 Hz | | 300 |
| **K- 07 15 02 59** | G 3/8 | G 1/4 | 1500 | 35 | 230 V, 50 Hz | | 300 |
| **K- 07 15 02 60** | G 1/2" | G 1/2 | 2000 | 35 | 230 V, 50 Hz | | 400 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*