
K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

Properties

Media	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Working pressure	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
Temp. range	-20 °C to +80 °C
Piston rod	Hardened steel, thick-chromed
Piston	Brass (12 to 16 mm); Aluminium (20 to 100 mm)
Sealant	NBR
Cylinder pipe	Aluminium



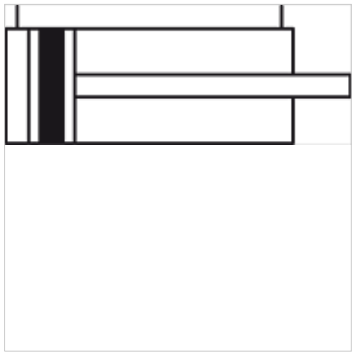

Note

Further information on request

Description

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100

Additional information

Important: The scope of supply does not include a connector. Please order separately.
Other piston-Ø and stroke versions available on request.

Item

Identification	Ø piston	Stroke (mm)	Type	Ø piston rod (mm)	thread internal piston rod
K- 07 15 12 15	12 mm	5	1	6	M 3 x 0.5
K- 07 15 12 16	12 mm	10	1	6	M 3 x 0.5
K- 07 15 12 17	12 mm	20	1	6	M 3 x 0.5
K- 07 15 12 18	12 mm	25	1	6	M 3 x 0.5
K- 07 15 12 19	12 mm	30	1	6	M 3 x 0.5
K- 07 15 12 20	12 mm	35	1	6	M 3 x 0.5
K- 07 15 12 21	12 mm	40	1	6	M 3 x 0.5
K- 07 15 12 22	12 mm	45	1	6	M 3 x 0.5
K- 07 15 12 23	12 mm	50	1	6	M 3 x 0.5
K- 07 15 12 24	16 mm	5	1	8	M 4 x 0.7
K- 07 15 12 25	16 mm	10	1	8	M 4 x 0.7
K- 07 15 12 26	16 mm	20	1	8	M 4 x 0.7
K- 07 15 12 27	16 mm	25	1	8	M 4 x 0.7
K- 07 15 12 28	16 mm	30	1	8	M 4 x 0.7
K- 07 15 12 29	16 mm	35	1	8	M 4 x 0.7
K- 07 15 12 30	16 mm	40	1	8	M 4 x 0.7
K- 07 15 12 31	16 mm	45	1	8	M 4 x 0.7
K- 07 15 12 32	16 mm	50	1	8	M 4 x 0.7
K- 07 15 12 33	16 mm	55	1	8	M 4 x 0.7
K- 07 15 12 34	16 mm	60	1	8	M 4 x 0.7
K- 07 15 12 35	20 mm	5	2	10	M 5 x 0.8
K- 07 15 12 36	20 mm	10	2	10	M 5 x 0.8
K- 07 15 12 37	20 mm	20	2	10	M 5 x 0.8
K- 07 15 12 38	20 mm	25	2	10	M 5 x 0.8
K- 07 15 12 39	20 mm	30	2	10	M 5 x 0.8
K- 07 15 12 40	20 mm	35	2	10	M 5 x 0.8
K- 07 15 12 41	20 mm	40	2	10	M 5 x 0.8
K- 07 15 12 42	20 mm	45	2	10	M 5 x 0.8
K- 07 15 12 43	20 mm	50	2	10	M 5 x 0.8
K- 07 15 12 44	20 mm	55	2	10	M 5 x 0.8
K- 07 15 12 45	20 mm	60	2	10	M 5 x 0.8
K- 07 15 12 46	20 mm	70	2	10	M 5 x 0.8
K- 07 15 12 47	20 mm	75	2	10	M 5 x 0.8
K- 07 15 12 48	20 mm	80	2	10	M 5 x 0.8
K- 07 15 12 49	25 mm	5	2	12	M 6 x 1

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA-FLEX

Item

Identification	Ø piston	Stroke (mm)	Type	Ø piston rod (mm)	thread internal piston rod
K- 07 15 12 50	25 mm	10	2	12	M 6 x 1
K- 07 15 12 51	25 mm	20	2	12	M 6 x 1
K- 07 15 12 52	25 mm	25	2	12	M 6 x 1
K- 07 15 12 53	25 mm	30	2	12	M 6 x 1
K- 07 15 12 54	25 mm	35	2	12	M 6 x 1
K- 07 15 12 55	25 mm	40	2	12	M 6 x 1
K- 07 15 12 56	25 mm	45	2	12	M 6 x 1
K- 07 15 12 57	25 mm	50	2	12	M 6 x 1
K- 07 15 12 58	25 mm	55	2	12	M 6 x 1
K- 07 15 12 59	25 mm	60	2	12	M 6 x 1
K- 07 15 12 60	25 mm	70	2	12	M 6 x 1
K- 07 15 12 61	25 mm	75	2	12	M 6 x 1
K- 07 15 12 62	25 mm	80	2	12	M 6 x 1
K- 07 15 12 63	32 mm	5	3	16	M 8 x 1.25
K- 07 15 12 64	32 mm	10	3	16	M 8 x 1.25
K- 07 15 12 65	32 mm	20	3	16	M 8 x 1.25
K- 07 15 12 66	32 mm	25	3	16	M 8 x 1.25
K- 07 15 12 67	32 mm	30	3	16	M 8 x 1.25
K- 07 15 12 68	32 mm	35	3	16	M 8 x 1.25
K- 07 15 12 69	32 mm	40	3	16	M 8 x 1.25
K- 07 15 12 70	32 mm	45	3	16	M 8 x 1.25
K- 07 15 12 71	32 mm	50	3	16	M 8 x 1.25
K- 07 15 12 72	32 mm	55	3	16	M 8 x 1.25
K- 07 15 12 73	32 mm	60	3	16	M 8 x 1.25
K- 07 15 12 74	32 mm	70	3	16	M 8 x 1.25
K- 07 15 12 75	32 mm	75	3	16	M 8 x 1.25
K- 07 15 12 76	32 mm	80	3	16	M 8 x 1.25
K- 07 15 12 77	40 mm	5	3	16	M 8 x 1.25
K- 07 15 12 78	40 mm	10	3	16	M 8 x 1.25
K- 07 15 12 79	40 mm	20	3	16	M 8 x 1.25
K- 07 15 12 80	40 mm	25	3	16	M 8 x 1.25
K- 07 15 12 81	40 mm	30	3	16	M 8 x 1.25
K- 07 15 12 82	40 mm	35	3	16	M 8 x 1.25
K- 07 15 12 83	40 mm	40	3	16	M 8 x 1.25
K- 07 15 12 84	40 mm	45	3	16	M 8 x 1.25
K- 07 15 12 85	40 mm	50	3	16	M 8 x 1.25
K- 07 15 12 86	40 mm	55	3	16	M 8 x 1.25
K- 07 15 12 87	40 mm	60	3	16	M 8 x 1.25
K- 07 15 12 88	40 mm	70	3	16	M 8 x 1.25
K- 07 15 12 89	40 mm	75	3	16	M 8 x 1.25
K- 07 15 12 90	40 mm	80	3	16	M 8 x 1.25
K- 07 15 12 91	50 mm	5	3	20	M 10 x 1.5
K- 07 15 12 92	50 mm	10	3	20	M 10 x 1.5
K- 07 15 12 93	50 mm	20	3	20	M 10 x 1.5
K- 07 15 12 94	50 mm	25	3	20	M 10 x 1.5
K- 07 15 12 95	50 mm	30	3	20	M 10 x 1.5
K- 07 15 12 96	50 mm	35	3	20	M 10 x 1.5
K- 07 15 12 97	50 mm	40	3	20	M 10 x 1.5
K- 07 15 12 98	50 mm	45	3	20	M 10 x 1.5
K- 07 15 12 99	50 mm	50	3	20	M 10 x 1.5
K- 07 15 13 00	50 mm	55	3	20	M 10 x 1.5
K- 07 15 13 01	50 mm	60	3	20	M 10 x 1.5
K- 07 15 13 02	50 mm	70	3	20	M 10 x 1.5
K- 07 15 13 03	50 mm	75	3	20	M 10 x 1.5
K- 07 15 13 04	50 mm	80	3	20	M 10 x 1.5
K- 07 15 13 05	63 mm	5	3	20	M 10 x 1.5
K- 07 15 13 06	63 mm	10	3	20	M 10 x 1.5
K- 07 15 13 07	63 mm	20	3	20	M 10 x 1.5
K- 07 15 13 08	63 mm	25	3	20	M 10 x 1.5
K- 07 15 13 09	63 mm	30	3	20	M 10 x 1.5
K- 07 15 13 10	63 mm	35	3	20	M 10 x 1.5
K- 07 15 13 11	63 mm	40	3	20	M 10 x 1.5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA-FLEX

Item

Identification	Ø piston	Stroke (mm)	Type	Ø piston rod (mm)	thread internal piston rod
K- 07 15 13 12	63 mm	45	3	20	M 10 x 1.5
K- 07 15 13 13	63 mm	50	3	20	M 10 x 1.5
K- 07 15 13 14	63 mm	55	3	20	M 10 x 1.5
K- 07 15 13 15	63 mm	60	3	20	M 10 x 1.5
K- 07 15 13 16	63 mm	70	3	20	M 10 x 1.5
K- 07 15 13 17	63 mm	75	3	20	M 10 x 1.5
K- 07 15 13 18	63 mm	80	3	20	M 10 x 1.5
K- 07 15 13 19	80 mm	5	3	25	M 16 x 2
K- 07 15 13 20	80 mm	10	3	25	M 16 x 2
K- 07 15 13 21	80 mm	20	3	25	M 16 x 2
K- 07 15 13 22	80 mm	25	3	25	M 16 x 2
K- 07 15 13 23	80 mm	30	3	25	M 16 x 2
K- 07 15 13 24	80 mm	35	3	25	M 16 x 2
K- 07 15 13 25	80 mm	40	3	25	M 16 x 2
K- 07 15 13 26	80 mm	45	3	25	M 16 x 2
K- 07 15 13 27	80 mm	50	3	25	M 16 x 2
K- 07 15 13 28	80 mm	55	3	25	M 16 x 2
K- 07 15 13 29	80 mm	60	3	25	M 16 x 2
K- 07 15 13 30	80 mm	70	3	25	M 16 x 2
K- 07 15 13 31	80 mm	75	3	25	M 16 x 2
K- 07 15 13 32	80 mm	80	3	25	M 16 x 2
K- 07 15 12 01	100 mm	5	3	32	M 20 x 2.5
K- 07 15 12 02	100 mm	10	3	32	M 20 x 2.5
K- 07 15 12 03	100 mm	20	3	32	M 20 x 2.5
K- 07 15 12 04	100 mm	25	3	32	M 20 x 2.5
K- 07 15 12 05	100 mm	30	3	32	M 20 x 2.5
K- 07 15 12 06	100 mm	35	3	32	M 20 x 2.5
K- 07 15 12 07	100 mm	40	3	32	M 20 x 2.5
K- 07 15 12 08	100 mm	45	3	32	M 20 x 2.5
K- 07 15 12 09	100 mm	50	3	32	M 20 x 2.5
K- 07 15 12 10	100 mm	55	3	32	M 20 x 2.5
K- 07 15 12 11	100 mm	60	3	32	M 20 x 2.5
K- 07 15 12 12	100 mm	70	3	32	M 20 x 2.5
K- 07 15 12 13	100 mm	75	3	32	M 20 x 2.5
K- 07 15 12 14	100 mm	80	3	32	M 20 x 2.5

Accessories

K-FUSSBEFESTIGUNG TYP LB 3	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA2	Flange model, »FA« type
K-SCHWENKGABELBEFESTIG CB 1	Female hinge model, »CB« type
K-GABELKOEPFE TYP Y SET 1	Fork model, »Y« type (incl. threaded adapter)
K-GELENKAUGEN TYP UNIT SET 1	Rod eye model, »UNIT« type (incl. threaded adapter)
K-SENSOREN CS1 KH MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 KH OHNE STECKER	Sensors »CS1« type, cable without plug

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.