



# K-XRD STECKANSCHLUSS Z SCH AGR-K BE

Straight non-return valves, flow direction from port to tube, conical male thread, coated

**HANSA FLEX**

## Properties

<b>Working pressure</b>	Max. 10 bar, vacuum
<b>Application</b>	Air, vacuum
<b>Recommended hoses</b>	PU or PA (nylon)
<b>Media</b>	Compressed air
<b>Standard</b>	R thread acc. to ISO 7-1, thread coating
<b>Temp. range</b>	0 °C to +60 °C
<b>Sealing surface</b>	Conical version: thread coating
<b>Material</b>	Plastic, Nickel plated brass
<b>Contact pressure ring</b>	Plastic

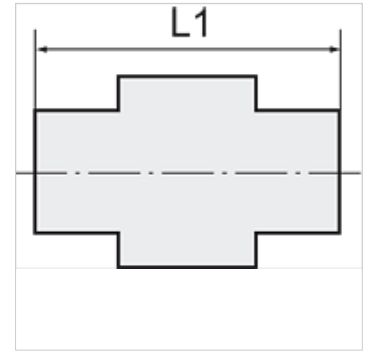

## Note

Further information on request

## Description

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Item	Identification	Thread	for external hose Ø	L1 (mm)	Opening pressure (bar)	AF
	K- 07 40 08 88	R 1/8	4 mm	24,0	0,2	10 mm
	K- 07 40 08 89	R 1/8	6 mm	31,0	0,2	12 mm
	K- 07 40 08 90	R 1/8	8 mm	32,8	0,2	14 mm
	K- 07 40 08 86	R 1/4	6 mm	33,0	0,2	14 mm
	K- 07 40 08 87	R 1/4	8 mm	34,8	0,2	14 mm
	K- 07 40 08 91	R 3/8	10 mm	41,0	0,2	17 mm
	K- 07 40 08 92	R 3/8	12 mm	42,5	0,2	21 mm
	K- 07 40 08 84	R 1/2	10 mm	43,0	0,2	21 mm
	K- 07 40 08 85	R 1/2	12 mm	44,5	0,2	21 mm