


K-MV O (NO) D 230 V, 50 HZ H VA

Normally open, (NO), directly operated, 230 V, 50 Hz, for high pressures VA

HANSA FLEX

Properties

Electrical connection	device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket
Thread description	G thread acc. DIN EN ISO 228-1
Media temperature	max. 80 °C when using water or oils; max. 90 °C when using with air
Protection IP	IP 65
Max. working pressure	20 bar
Sealant	FPM
Housing, valve seat	Stainless steel 1.4301
Internal parts	Stainless steel

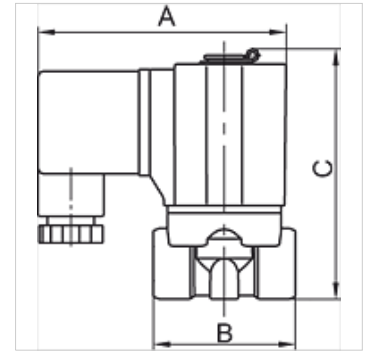

Note

Further information on request

Description

Standard series in two different versions: Directly operated, Pilot-operated

Item						
Identification	Thread	DN	A (mm)	B (mm)	C (mm)	Type
K- 07 30 01 38	G 1/8	1,5	70,0	40,0	76,0	2
K- 07 30 01 39	G 1/4	1,5	70,0	40,0	76,0	2
K- 07 30 01 40	G 3/8	3,0	85,0	52,0	92,0	2
K- 07 30 01 41	G 1/2	3,0	85,0	52,0	92,0	2