


K-WV 3/2 MANU DRUCKKNOPF SCHALT M3

3/2-way valve, manually operated, with pushbutton, NC, monostable, for panel mounting

HANSA FLEX

Properties

Operating pressure	0 - 10 bar
Temp. range	-20 °C to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
Valve body	Aluminium alloy

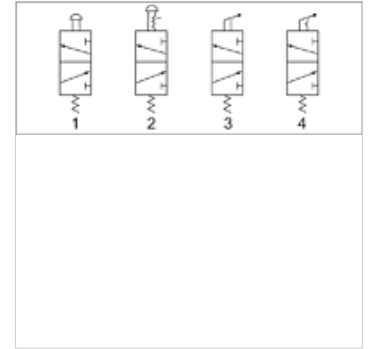

Note

Further information on request

Item

Identification	Connection	Vent port	Flow rate (L/min)	switching lever color	circuit diagram number
K- 07 15 01 47	G 1/8	G 1/8	450	Black	1
K- 07 15 01 48	G 1/8	G 1/8	450	Red	1
K- 07 15 01 49	G 1/8	G 1/8	450	green	1
K- 07 15 01 50	G 1/4	G 1/4	550	Black	1
K- 07 15 01 51	G 1/4	G 1/4	550	Red	1
K- 07 15 01 52	G 1/4	G 1/4	550	green	1