


# K-WV 3/2 MANU PILZTAST SCHALT M3

3/2-way valve, manually operated, with mushroom pushbutton, NC, monostable, for panel mounting

**HANSA FLEX**

## Properties

Operating pressure	0 - 10 bar
Temp. range	-20 °C to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
Valve body	Aluminium alloy

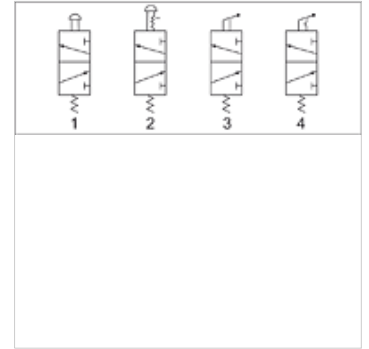

## Note

Further information on request

## Item

Identification	Connection	Vent port	Flow rate (L/min)	switching lever color	circuit diagram number
K- 07 15 01 53	G 1/8	G 1/8	450	Black	1
K- 07 15 01 54	G 1/8	G 1/8	450	Red	1
K- 07 15 01 55	G 1/8	G 1/8	450	green	1
K- 07 15 01 56	G 1/4	G 1/4	550	Black	1
K- 07 15 01 57	G 1/4	G 1/4	550	Red	1
K- 07 15 01 58	G 1/4	G 1/4	550	green	1