


# K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

**HANSA FLEX**

## Properties

<b>Media</b>	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
<b>Working pressure</b>	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
<b>Temp. range</b>	-20 °C to +70 °C
<b>Piston rod</b>	Stainless steel 1.4301
<b>Design</b>	Type "CA" = ground cover with threaded pin - swivel design Type "CM" = ground cover with threaded pin round - swivel design
<b>Piston</b>	Stainless steel 1.4305 (8 to 12 mm); Alu (16 to 40 mm)
<b>Sealant</b>	NBR
<b>Cylinder pipe</b>	Stainless steel 1.4301

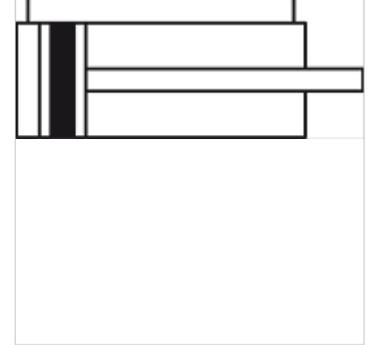

## Note

Further information on request

## Description

Circular cylinder in stainless steel in different versions: Series "MI" double-acting, Ø 8 – 25 in accordance with ISO 6432  
Series "MI" double-acting, Ø 32 - 40

Item	Identification	Ø piston	Stroke (mm)	Design	Ø piston rod (mm)	Piston rod thread
K- 07 15 17 90		8 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 91		8 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 92		8 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 93		8 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 94		8 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 95		8 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 96		8 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 97		8 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 98		8 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 99		8 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 00		8 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 01		8 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 02		8 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 03		10 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 04		10 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 05		10 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 06		10 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 07		10 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 08		10 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 09		10 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 10		10 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 11		10 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 12		10 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 13		10 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 14		10 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 15		10 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 16		10 mm	160	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 17		10 mm	175	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 18		10 mm	200	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 19		12 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 20		12 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 21		12 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 22		12 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 23		12 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 24		12 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 25		12 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 26		12 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1



Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

# K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

**HANSA FLEX**

Item	Identification	Ø piston	Stroke (mm)	Design	Ø piston rod (mm)	Piston rod thread
	K- 07 15 18 27	12 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 28	12 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 29	12 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 30	12 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 31	12 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 32	12 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 33	12 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 34	12 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 35	12 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 36	16 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 37	16 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 38	16 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 39	16 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 40	16 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 41	16 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 42	16 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 43	16 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 44	16 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 45	16 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 46	16 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 47	16 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 48	16 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 49	16 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 50	16 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 51	16 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 52	16 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 53	16 mm	300	»CA« type, acc. to ISO 6432	6	M 6 x 1
	K- 07 15 18 54	20 mm	10	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 55	20 mm	15	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 56	20 mm	20	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 57	20 mm	25	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 58	20 mm	30	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 59	20 mm	40	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 60	20 mm	50	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 61	20 mm	60	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 62	20 mm	75	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 63	20 mm	80	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 64	20 mm	100	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 65	20 mm	125	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 66	20 mm	150	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 67	20 mm	160	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 68	20 mm	175	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 69	20 mm	200	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 70	20 mm	250	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 71	20 mm	300	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 72	20 mm	350	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 73	20 mm	400	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 74	20 mm	450	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 75	20 mm	500	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 76	20 mm	600	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
	K- 07 15 18 77	25 mm	10	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 78	25 mm	15	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 79	25 mm	20	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 80	25 mm	25	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 81	25 mm	30	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 82	25 mm	40	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 83	25 mm	50	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 84	25 mm	60	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 85	25 mm	75	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 86	25 mm	80	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 87	25 mm	100	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
	K- 07 15 18 88	25 mm	125	»CA« type, acc. to ISO 6432	10	M 10 x 1.25



Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

06.06.2026

HANSA-FLEX AG

www.hansa-flex.com

2

# K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

**HANSA FLEX**

Item	Identification	Ø piston	Stroke (mm)	Design	Ø piston rod (mm)	Piston rod thread
K- 07 15 18 89		25 mm	150	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 90		25 mm	160	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 91		25 mm	175	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 92		25 mm	200	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 93		25 mm	250	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 94		25 mm	300	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 95		25 mm	350	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 96		25 mm	400	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 97		25 mm	450	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 98		25 mm	500	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 99		25 mm	600	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 19 00		32 mm	10	»CM« type	12	M 10 x 1.25
K- 07 15 19 01		32 mm	15	»CM« type	12	M 10 x 1.25
K- 07 15 19 02		32 mm	20	»CM« type	12	M 10 x 1.25
K- 07 15 19 03		32 mm	25	»CM« type	12	M 10 x 1.25
K- 07 15 19 04		32 mm	30	»CM« type	12	M 10 x 1.25
K- 07 15 19 05		32 mm	40	»CM« type	12	M 10 x 1.25
K- 07 15 19 06		32 mm	50	»CM« type	12	M 10 x 1.25
K- 07 15 19 07		32 mm	60	»CM« type	12	M 10 x 1.25
K- 07 15 19 08		32 mm	75	»CM« type	12	M 10 x 1.25
K- 07 15 19 09		32 mm	80	»CM« type	12	M 10 x 1.25
K- 07 15 19 10		32 mm	100	»CM« type	12	M 10 x 1.25
K- 07 15 19 11		32 mm	125	»CM« type	12	M 10 x 1.25
K- 07 15 19 12		32 mm	150	»CM« type	12	M 10 x 1.25
K- 07 15 19 13		32 mm	160	»CM« type	12	M 10 x 1.25
K- 07 15 19 14		32 mm	175	»CM« type	12	M 10 x 1.25
K- 07 15 19 15		32 mm	200	»CM« type	12	M 10 x 1.25
K- 07 15 19 16		32 mm	250	»CM« type	12	M 10 x 1.25
K- 07 15 19 17		32 mm	300	»CM« type	12	M 10 x 1.25
K- 07 15 19 18		32 mm	350	»CM« type	12	M 10 x 1.25
K- 07 15 19 19		32 mm	400	»CM« type	12	M 10 x 1.25
K- 07 15 19 20		32 mm	450	»CM« type	12	M 10 x 1.25
K- 07 15 19 21		32 mm	500	»CM« type	12	M 10 x 1.25
K- 07 15 19 22		32 mm	600	»CM« type	12	M 10 x 1.25
K- 07 15 19 23		40 mm	10	»CM« type	16	M 12 x 1.25
K- 07 15 19 24		40 mm	15	»CM« type	16	M 12 x 1.25
K- 07 15 19 25		40 mm	20	»CM« type	16	M 12 x 1.25
K- 07 15 19 26		40 mm	25	»CM« type	16	M 12 x 1.25
K- 07 15 19 27		40 mm	30	»CM« type	16	M 12 x 1.25
K- 07 15 19 28		40 mm	40	»CM« type	16	M 12 x 1.25
K- 07 15 19 29		40 mm	50	»CM« type	16	M 12 x 1.25
K- 07 15 19 30		40 mm	60	»CM« type	16	M 12 x 1.25
K- 07 15 19 31		40 mm	75	»CM« type	16	M 12 x 1.25
K- 07 15 19 32		40 mm	80	»CM« type	16	M 12 x 1.25
K- 07 15 19 33		40 mm	100	»CM« type	16	M 12 x 1.25
K- 07 15 19 34		40 mm	125	»CM« type	16	M 12 x 1.25
K- 07 15 19 35		40 mm	150	»CM« type	16	M 12 x 1.25
K- 07 15 19 36		40 mm	160	»CM« type	16	M 12 x 1.25
K- 07 15 19 37		40 mm	175	»CM« type	16	M 12 x 1.25
K- 07 15 19 38		40 mm	200	»CM« type	16	M 12 x 1.25
K- 07 15 19 39		40 mm	250	»CM« type	16	M 12 x 1.25
K- 07 15 19 40		40 mm	300	»CM« type	16	M 12 x 1.25
K- 07 15 19 41		40 mm	350	»CM« type	16	M 12 x 1.25
K- 07 15 19 42		40 mm	400	»CM« type	16	M 12 x 1.25
K- 07 15 19 43		40 mm	450	»CM« type	16	M 12 x 1.25
K- 07 15 19 44		40 mm	500	»CM« type	16	M 12 x 1.25
K- 07 15 19 45		40 mm	600	»CM« type	16	M 12 x 1.25

## Accessories

K-FUSSBEFESTIGUNG TYP LB 1	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA3	Flange model, »FA« type
K-SCHWENKLAGER TYP SDB	Counter-hinge model, »SDB« type



Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

# K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI«  
Series

**HANSA FLEX**

---