K-KOMP ZYL DOPPELW


Compact cylinders, double-acting, with magnet, non-cushioned

HANSA-FLEX

Properties

Media	Filtered compressed air, lubricated (ensure continuity) or unlubricated
Working pressure	1 - 10 bar
Temp. range	-20 °C to +80 °C
Piston rod	Stainless steel 1.1191
Piston	Aluminium
Sealant	NBR
Cylinder pipe	Aluminium



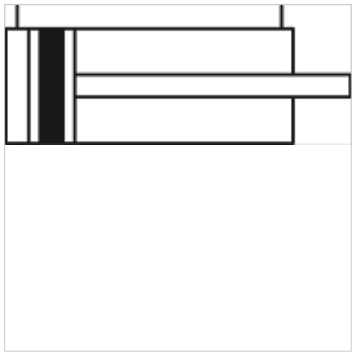

Note

Further information on request

Description

Characterised by a very short and compact design.

Item

Identification	Ø piston	Stroke (mm)	Ø piston rod (mm)	thread internal piston rod
K- 07 15 09 75	12 mm	5	6	M 3 x 0.5
K- 07 15 09 76	12 mm	10	6	M 3 x 0.5
K- 07 15 09 77	12 mm	15	6	M 3 x 0.5
K- 07 15 09 78	12 mm	20	6	M 3 x 0.5
K- 07 15 09 79	12 mm	25	6	M 3 x 0.5
K- 07 15 09 80	12 mm	30	6	M 3 x 0.5
K- 07 15 09 81	12 mm	35	6	M 3 x 0.5
K- 07 15 09 82	12 mm	40	6	M 3 x 0.5
K- 07 15 09 83	12 mm	45	6	M 3 x 0.5
K- 07 15 09 84	12 mm	50	6	M 3 x 0.5
K- 07 15 09 85	12 mm	55	6	M 3 x 0.5
K- 07 15 09 86	12 mm	60	6	M 3 x 0.5
K- 07 15 09 87	16 mm	5	8	M 4 x 0.7
K- 07 15 09 88	16 mm	10	8	M 4 x 0.7
K- 07 15 09 89	16 mm	15	8	M 4 x 0.7
K- 07 15 09 90	16 mm	20	8	M 4 x 0.7
K- 07 15 09 91	16 mm	25	8	M 4 x 0.7
K- 07 15 09 92	16 mm	30	8	M 4 x 0.7
K- 07 15 09 93	16 mm	35	8	M 4 x 0.7
K- 07 15 09 94	16 mm	40	8	M 4 x 0.7
K- 07 15 09 95	16 mm	45	8	M 4 x 0.7
K- 07 15 09 96	16 mm	50	8	M 4 x 0.7
K- 07 15 09 97	16 mm	55	8	M 4 x 0.7
K- 07 15 09 98	16 mm	60	8	M 4 x 0.7
K- 07 15 09 99	20 mm	5	10	M 5 x 0.8
K- 07 15 10 00	20 mm	10	10	M 5 x 0.8
K- 07 15 10 01	20 mm	15	10	M 5 x 0.8
K- 07 15 10 02	20 mm	20	10	M 5 x 0.8
K- 07 15 10 03	20 mm	25	10	M 5 x 0.8
K- 07 15 10 04	20 mm	30	10	M 5 x 0.8
K- 07 15 10 05	20 mm	35	10	M 5 x 0.8
K- 07 15 10 06	20 mm	40	10	M 5 x 0.8
K- 07 15 10 07	20 mm	45	10	M 5 x 0.8
K- 07 15 10 08	20 mm	50	10	M 5 x 0.8
K- 07 15 10 09	20 mm	55	10	M 5 x 0.8
K- 07 15 10 10	20 mm	60	10	M 5 x 0.8
K- 07 15 10 11	20 mm	65	10	M 5 x 0.8
K- 07 15 10 12	20 mm	70	10	M 5 x 0.8
K- 07 15 10 13	20 mm	75	10	M 5 x 0.8
K- 07 15 10 14	20 mm	80	10	M 5 x 0.8
K- 07 15 10 15	25 mm	5	10	M 5 x 0.8
K- 07 15 10 16	25 mm	10	10	M 5 x 0.8

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

K-KOMP ZYL DOPPELW

Compact cylinders, double-acting, with magnet, non-cushioned

HANSA-FLEX

Item

Identification	Ø piston	Stroke (mm)	Ø piston rod (mm)	thread internal piston rod
K- 07 15 10 17	25 mm	15	10	M 5 x 0.8
K- 07 15 10 18	25 mm	20	10	M 5 x 0.8
K- 07 15 10 19	25 mm	25	10	M 5 x 0.8
K- 07 15 10 20	25 mm	30	10	M 5 x 0.8
K- 07 15 10 21	25 mm	35	10	M 5 x 0.8
K- 07 15 10 22	25 mm	40	10	M 5 x 0.8
K- 07 15 10 23	25 mm	45	10	M 5 x 0.8
K- 07 15 10 24	25 mm	50	10	M 5 x 0.8
K- 07 15 10 25	25 mm	55	10	M 5 x 0.8
K- 07 15 10 26	25 mm	60	10	M 5 x 0.8
K- 07 15 10 27	25 mm	65	10	M 5 x 0.8
K- 07 15 10 28	25 mm	70	10	M 5 x 0.8
K- 07 15 10 29	25 mm	75	10	M 5 x 0.8
K- 07 15 10 30	25 mm	80	10	M 5 x 0.8
K- 07 15 10 31	32 mm	5	12	M 6 x 1
K- 07 15 10 32	32 mm	10	12	M 6 x 1
K- 07 15 10 33	32 mm	15	12	M 6 x 1
K- 07 15 10 34	32 mm	20	12	M 6 x 1
K- 07 15 10 35	32 mm	25	12	M 6 x 1
K- 07 15 10 36	32 mm	30	12	M 6 x 1
K- 07 15 10 37	32 mm	35	12	M 6 x 1
K- 07 15 10 38	32 mm	40	12	M 6 x 1
K- 07 15 10 39	32 mm	45	12	M 6 x 1
K- 07 15 10 40	32 mm	50	12	M 6 x 1
K- 07 15 10 41	32 mm	55	12	M 6 x 1
K- 07 15 10 42	32 mm	60	12	M 6 x 1
K- 07 15 10 43	32 mm	65	12	M 6 x 1
K- 07 15 10 44	32 mm	70	12	M 6 x 1
K- 07 15 10 45	32 mm	75	12	M 6 x 1
K- 07 15 10 46	32 mm	80	12	M 6 x 1
K- 07 15 10 47	32 mm	85	12	M 6 x 1
K- 07 15 10 48	32 mm	90	12	M 6 x 1
K- 07 15 10 49	32 mm	95	12	M 6 x 1
K- 07 15 10 50	32 mm	100	12	M 6 x 1
K- 07 15 10 51	40 mm	5	12	M 6 x 1
K- 07 15 10 52	40 mm	10	12	M 6 x 1
K- 07 15 10 53	40 mm	15	12	M 6 x 1
K- 07 15 10 54	40 mm	20	12	M 6 x 1
K- 07 15 10 55	40 mm	25	12	M 6 x 1
K- 07 15 10 56	40 mm	30	12	M 6 x 1
K- 07 15 10 57	40 mm	35	12	M 6 x 1
K- 07 15 10 58	40 mm	40	12	M 6 x 1
K- 07 15 10 59	40 mm	45	12	M 6 x 1
K- 07 15 10 60	40 mm	50	12	M 6 x 1
K- 07 15 10 61	40 mm	55	12	M 6 x 1
K- 07 15 10 62	40 mm	60	12	M 6 x 1
K- 07 15 10 63	40 mm	65	12	M 6 x 1
K- 07 15 10 64	40 mm	70	12	M 6 x 1
K- 07 15 10 65	40 mm	75	12	M 6 x 1
K- 07 15 10 66	40 mm	80	12	M 6 x 1
K- 07 15 10 67	40 mm	85	12	M 6 x 1
K- 07 15 10 68	40 mm	90	12	M 6 x 1
K- 07 15 10 69	40 mm	95	12	M 6 x 1
K- 07 15 10 70	40 mm	100	12	M 6 x 1
K- 07 15 10 71	50 mm	5	16	M 8 x 1.25
K- 07 15 10 72	50 mm	10	16	M 8 x 1.25
K- 07 15 10 73	50 mm	15	16	M 8 x 1.25
K- 07 15 10 74	50 mm	20	16	M 8 x 1.25
K- 07 15 10 75	50 mm	25	16	M 8 x 1.25
K- 07 15 10 76	50 mm	30	16	M 8 x 1.25
K- 07 15 10 77	50 mm	35	16	M 8 x 1.25
K- 07 15 10 78	50 mm	40	16	M 8 x 1.25
K- 07 15 10 79	50 mm	45	16	M 8 x 1.25

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

K-KOMP ZYL DOPPELW

Compact cylinders, double-acting, with magnet, non-cushioned

HANSA-FLEX

Item

Identification	Ø piston	Stroke (mm)	Ø piston rod (mm)	thread internal piston rod
K- 07 15 10 80	50 mm	50	16	M 8 x 1.25
K- 07 15 10 81	50 mm	55	16	M 8 x 1.25
K- 07 15 10 82	50 mm	60	16	M 8 x 1.25
K- 07 15 10 83	50 mm	65	16	M 8 x 1.25
K- 07 15 10 84	50 mm	70	16	M 8 x 1.25
K- 07 15 10 85	50 mm	75	16	M 8 x 1.25
K- 07 15 10 86	50 mm	80	16	M 8 x 1.25
K- 07 15 10 87	50 mm	85	16	M 8 x 1.25
K- 07 15 10 88	50 mm	90	16	M 8 x 1.25
K- 07 15 10 89	50 mm	95	16	M 8 x 1.25
K- 07 15 10 90	50 mm	100	16	M 8 x 1.25
K- 07 15 10 91	63 mm	5	16	M 8 x 1.25
K- 07 15 10 92	63 mm	10	16	M 8 x 1.25
K- 07 15 10 93	63 mm	15	16	M 8 x 1.25
K- 07 15 10 94	63 mm	20	16	M 8 x 1.25
K- 07 15 10 95	63 mm	25	16	M 8 x 1.25
K- 07 15 10 96	63 mm	30	16	M 8 x 1.25
K- 07 15 10 97	63 mm	35	16	M 8 x 1.25
K- 07 15 10 98	63 mm	40	16	M 8 x 1.25
K- 07 15 10 99	63 mm	45	16	M 8 x 1.25
K- 07 15 11 00	63 mm	50	16	M 8 x 1.25
K- 07 15 11 01	63 mm	55	16	M 8 x 1.25
K- 07 15 11 02	63 mm	60	16	M 8 x 1.25
K- 07 15 11 03	63 mm	65	16	M 8 x 1.25
K- 07 15 11 04	63 mm	70	16	M 8 x 1.25
K- 07 15 11 05	63 mm	75	16	M 8 x 1.25
K- 07 15 11 06	63 mm	80	16	M 8 x 1.25
K- 07 15 11 07	63 mm	85	16	M 8 x 1.25
K- 07 15 11 08	63 mm	90	16	M 8 x 1.25
K- 07 15 11 09	63 mm	95	16	M 8 x 1.25
K- 07 15 11 10	63 mm	100	16	M 8 x 1.25
K- 07 15 11 11	80 mm	5	20	M 10 x 1.5
K- 07 15 11 12	80 mm	10	20	M 10 x 1.5
K- 07 15 11 13	80 mm	15	20	M 10 x 1.5
K- 07 15 11 14	80 mm	20	20	M 10 x 1.5
K- 07 15 11 15	80 mm	25	20	M 10 x 1.5
K- 07 15 11 16	80 mm	30	20	M 10 x 1.5
K- 07 15 11 17	80 mm	35	20	M 10 x 1.5
K- 07 15 11 18	80 mm	40	20	M 10 x 1.5
K- 07 15 11 19	80 mm	45	20	M 10 x 1.5
K- 07 15 11 20	80 mm	50	20	M 10 x 1.5
K- 07 15 11 21	80 mm	55	20	M 10 x 1.5
K- 07 15 11 22	80 mm	60	20	M 10 x 1.5
K- 07 15 11 23	80 mm	65	20	M 10 x 1.5
K- 07 15 11 24	80 mm	70	20	M 10 x 1.5
K- 07 15 11 25	80 mm	75	20	M 10 x 1.5
K- 07 15 11 26	80 mm	80	20	M 10 x 1.5
K- 07 15 11 27	80 mm	85	20	M 10 x 1.5
K- 07 15 11 28	80 mm	90	20	M 10 x 1.5
K- 07 15 11 29	80 mm	95	20	M 10 x 1.5
K- 07 15 11 30	80 mm	100	20	M 10 x 1.5
K- 07 15 09 55	100 mm	5	25	M 12 x 1.75
K- 07 15 09 56	100 mm	10	25	M 12 x 1.75
K- 07 15 09 57	100 mm	15	25	M 12 x 1.75
K- 07 15 09 58	100 mm	20	25	M 12 x 1.75
K- 07 15 09 59	100 mm	25	25	M 12 x 1.75
K- 07 15 09 60	100 mm	30	25	M 12 x 1.75
K- 07 15 09 61	100 mm	35	25	M 12 x 1.75
K- 07 15 09 62	100 mm	40	25	M 12 x 1.75
K- 07 15 09 63	100 mm	45	25	M 12 x 1.75
K- 07 15 09 64	100 mm	50	25	M 12 x 1.75
K- 07 15 09 65	100 mm	55	25	M 12 x 1.75
K- 07 15 09 66	100 mm	60	25	M 12 x 1.75

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

K-KOMP ZYL DOPPELW

Compact cylinders, double-acting, with magnet, non-cushioned

HANSA-FLEX

Item

Identification	Ø piston	Stroke (mm)	Ø piston rod (mm)	thread internal piston rod
K- 07 15 09 67	100 mm	65	25	M 12 x 1.75
K- 07 15 09 68	100 mm	70	25	M 12 x 1.75
K- 07 15 09 69	100 mm	75	25	M 12 x 1.75
K- 07 15 09 70	100 mm	80	25	M 12 x 1.75
K- 07 15 09 71	100 mm	85	25	M 12 x 1.75
K- 07 15 09 72	100 mm	90	25	M 12 x 1.75
K- 07 15 09 73	100 mm	95	25	M 12 x 1.75
K- 07 15 09 74	100 mm	100	25	M 12 x 1.75

Accessories

K-FUSSBEFESTIGUNG TYP LB	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA	Flange model, »FA« type
K-SCHWENKAUGENBEFEST CA 1	Male hinge model, »CA« type
K-GABELKOEPFE TYP Y SET	Fork model, »Y« type (incl. threaded adapter)
K-GELENKAUGEN TYP UNIT SET	Rod eye model, »UNIT« type (incl. threaded adapter)
K-SENSOREN CS1 KH MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 KH OHNE STECKER	Sensors »CS1« type, cable without plug

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.