


K-T-MEHRFACHVERT 3 STECKNIP

Tee distributors with push-in plug, 3 outlets

HANSA FLEX

Properties

| | |
|------------------------------|--|
| Working pressure | Max. 15 bar, coarse vacuum |
| Application | Air, vacuum |
| Recommended hoses | PU or PA (nylon) |
| Media | Compressed air and all gases or liquids that are compatible with the materials |
| Temp. range | -20 °C to +80 °C |
| Material | Plastic, Nickel plated brass |
| Contact pressure ring | Plastic |

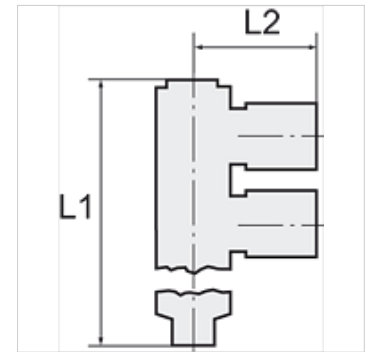

Note

Further information on request

Description

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Item

| Identification | for external hose \varnothing | L1 (mm) | L2 (mm) | Push-in plugs (mm) |
|----------------|---------------------------------|------------|------------|-----------------------|
| K- 07 40 43 54 | 3 x 4 mm | 81,0 | 22,7 | 6 |
| K- 07 40 43 55 | 3 x 4 mm | 104,5 | 24,7 | 8 |
| K- 07 40 43 56 | 3 x 6 mm | 106,0 | 24,7 | 8 |
| K- 07 40 43 57 | 3 x 8 mm | 109,5 | 27,2 | 10 |