


# K-X-STECKVERBINDUNG 1

X-unions

**HANSA FLEX**

## Properties

|                       |                     |
|-----------------------|---------------------|
| Working pressure      | Max. 16 bar         |
| Operating temperature | -20 °C to +80 °C    |
| Material              | Nickel-plated brass |
| Contact pressure ring | Hostaform           |
| Clamping ring         | Stainless steel     |

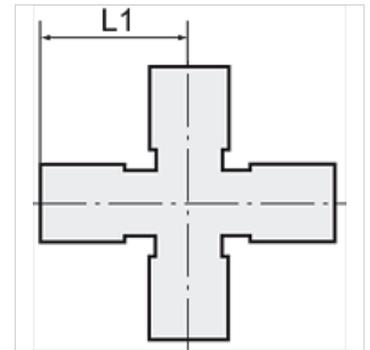

## Note

Further information on request

## Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Item

| Identification | for external hose $\varnothing$ | L1<br>(mm) |
|----------------|---------------------------------|------------|
| K- 07 40 47 29 | 4 mm                            | 18,6       |
| K- 07 40 47 30 | 6 mm                            | 21,9       |
| K- 07 40 47 31 | 8 mm                            | 25,4       |