
K-X-STECKVERBINDUNG 1

X-unions

Properties

Working pressure	Max. 16 bar
Operating temperature	-20 °C to +80 °C
Material	Nickel-plated brass
Contact pressure ring	Hostaform
Clamping ring	Stainless steel



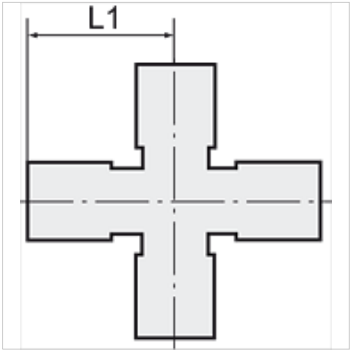

Note

Further information on request

Description

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Item

Identification	for external hose Ø	L1 (mm)
K- 07 40 47 29	4 mm	18,6
K- 07 40 47 30	6 mm	21,9
K- 07 40 47 31	8 mm	25,4

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.