



K-XRD STECKANSCHLUSS Z GEW AGR OR

Straight non-return valves, flow direction from tube to port, parallel male thread with O-ring

HANSA FLEX

Properties

Working pressure	Max. 10 bar, vacuum
Application	Air, vacuum
Recommended hoses	PU or PA (nylon)
Media	Compressed air
Standard	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring
Temp. range	0 °C to +60 °C
Sealing surface	O-ring (NBR)
Material	Plastic, Nickel plated brass
Contact pressure ring	Plastic

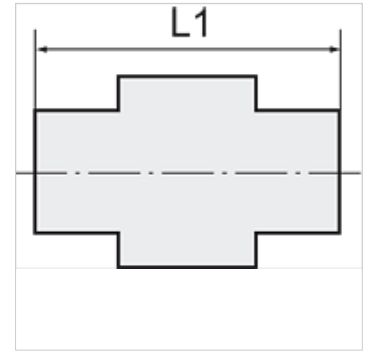

Note

Further information on request

Description

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Item					
Identification	Thread	for external hose Ø	L1 (mm)	Opening pressure (bar)	AF
K- 07 40 08 83	M 5	4 mm	31,0	0,2	10 mm
K- 07 40 08 78	G 1/8	4 mm	24,2	0,2	14 mm
K- 07 40 08 79	G 1/8	6 mm	31,0	0,2	14 mm
K- 07 40 08 80	G 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 76	G 1/4	6 mm	33,0	0,2	17 mm
K- 07 40 08 77	G 1/4	8 mm	34,8	0,2	17 mm
K- 07 40 08 81	G 3/8	10 mm	41,0	0,2	20 mm
K- 07 40 08 82	G 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 74	G 1/2	10 mm	43,0	0,2	24 mm
K- 07 40 08 75	G 1/2	12 mm	44,5	0,2	24 mm