


K-SCHOTT-STECKVERB VA

Female bulkhead connectors

HANSA FLEX

Properties

| | |
|---------------------------------|---|
| Working pressure pulsate | Max. 10 bar |
| Pressure | Max. 15 bar (depending on pipe quality) |
| Suitable pipe materials | PVDF, PTFE, stainless steel, PA, PU |
| Standard | G thread acc. to DIN EN ISO 228-1 |
| Ambient temperature | -20 °C to max. +150 °C (depending on pipe quality and diameter) |
| Material | Stainless steel 1.4404 |
| Sealant | FKM |

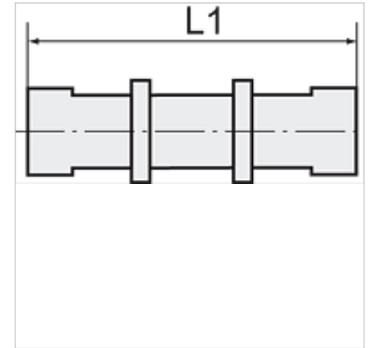

Note

Further information on request

Description

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

Item

| Identification | Thread | for external hose Ø | L1 (mm) | AF |
|----------------|------------|---------------------|---------|-------|
| K- 07 40 24 30 | M 12 x 1.0 | 4 mm | 28,0 | 15 mm |
| K- 07 40 24 31 | M 14 x 1.0 | 6 mm | 34,4 | 17 mm |
| K- 07 40 24 32 | M 16 x 1.0 | 8 mm | 34,5 | 19 mm |
| K- 07 40 24 33 | M 18 x 1.0 | 10 mm | 38,6 | 21 mm |
| K- 07 40 24 34 | M 20 x 1.0 | 12 mm | 40,8 | 24 mm |