


# K-WV 5/2 MECHA ROLLENHEB RUECKKL M5

5/2-way valve, mechanically operated, with free-return roller lever

**HANSA FLEX**

## Properties

|                              |  |
|------------------------------|--|
| <b>Operating pressure</b>    | 0 - 10 bar   |
| <b>Temp. range</b>           | -20 °C to +70 °C   |
| <b>Flow rate measurement</b> | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar |
| <b>Valve body</b>            | Aluminium alloy  |

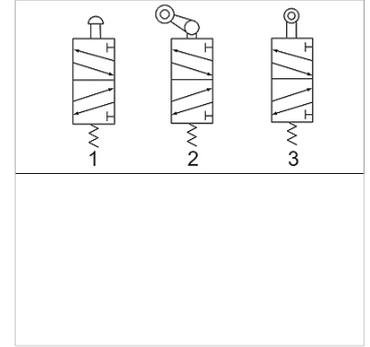

## Note

Further information on request

## Item

| Identification | Connection | Vent port | Flow rate (L/min) | circuit diagram number |
|----------------|------------|-----------|-------------------|------------------------|
| K- 07 15 03 14 | G 1/8      | G 1/8     | 450               | 2                      |
| K- 07 15 03 15 | G 1/4      | G 1/8     | 550               | 2                      |