


K-WV 3/2 BISTABIL 3A

3/2-way pilot valve, bistable

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Operating pressure | 1.5 - 8 bar |
| Temp. range | Up to +70 °C |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| Control air port | G 1/8 |
| Valve body | Aluminium alloy |

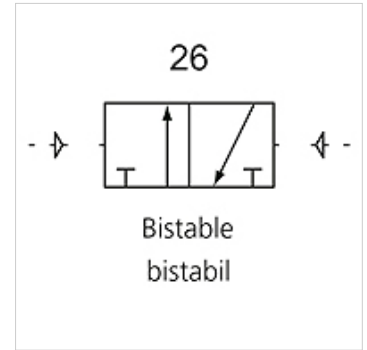

Note

Further information on request

Item

| Identification | Connection | Vent port | Flow rate (L/min) | circuit diagram number | Size |
|----------------|------------|-----------|-------------------|------------------------|------|
| K- 07 15 01 85 | M 5 | M 5 | 300 | 26 | 100 |
| K- 07 15 01 86 | G 1/8 | G 1/8 | 500 | 26 | 100 |
| K- 07 15 01 87 | G 1/8 | G 1/8 | 750 | 26 | 200 |
| K- 07 15 01 88 | G 1/4 | G 1/4 | 850 | 26 | 200 |
| K- 07 15 01 89 | G 1/4 | G 1/4 | 1300 | 26 | 300 |
| K- 07 15 01 90 | G 3/8 | G 3/8 | 1500 | 26 | 300 |