


# K-WV 3/2 BISTABIL 3A

3/2-way pilot valve, bistable

**HANSA FLEX**

## Properties

Operating pressure	1.5 - 8 bar
Temp. range	Up to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
Control air port	G 1/8
Valve body	Aluminium alloy

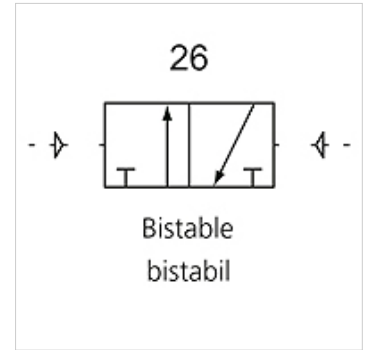

## Note

Further information on request

## Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number	Size
K- 07 15 01 85	M 5	M 5	300	26	100
K- 07 15 01 86	G 1/8	G 1/8	500	26	100
K- 07 15 01 87	G 1/8	G 1/8	750	26	200
K- 07 15 01 88	G 1/4	G 1/4	850	26	200
K- 07 15 01 89	G 1/4	G 1/4	1300	26	300
K- 07 15 01 90	G 3/8	G 3/8	1500	26	300