


K-DRG MANO HW G

Pressure regulators

HANSA FLEX

Properties

| | |
|------------------------------|--|
| Input pressure | Max. 10 bar |
| Media temperature | max. 70 °C |
| Ambient temperature | Max. 70 °C |
| Control range | 0,5 - 9 bar |
| Sealant | NBR |
| Spring bonnet | POM |
| Housing | Die-cast aluminium |
| Flow rate measurement | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |
| More information | User manual on request |

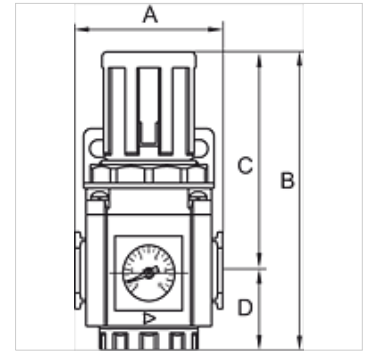

Item

| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | Size |
|----------------|--------|-------------------|--------|----------|--------|--------|------|
| K- 07 25 05 12 | G 1/4 | 1650 | 51,0 | 112.5 mm | 83,5 | 29,0 | 300 |
| K- 07 25 05 13 | G 3/8 | 2500 | 51,0 | 112.5 mm | 83,5 | 29,0 | 300 |
| K- 07 25 05 14 | G 1/2 | 2500 | 51,0 | 112.5 mm | 83,5 | 29,0 | 300 |
| K- 07 25 05 15 | G 3/8 | 4000 | 68,0 | 140.5 mm | 104,0 | 36,5 | 400 |
| K- 07 25 05 16 | G 1/2 | 4000 | 68,0 | 140.5 mm | 104,0 | 36,5 | 400 |
| K- 07 25 05 17 | G 3/4 | 12000 | 85,0 | 191.5 mm | 141,5 | 50,0 | 600 |
| K- 07 25 05 18 | G 1 | 12000 | 85,0 | 191.5 mm | 141,5 | 50,0 | 600 |

Accessories

| | |
|-------------------------------|-----------------------|
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-ERSATZMEMBRANE | Replacement diaphragm |
| K-ADAPTERPLATTEN HANSA | Adapter plate HANSA |
| K-HALTERBAUSATZ | Holder |
| K-VERBINDUNGSELEMENTE | Connecting sets |
| K-WANDHALTER | Wall bracket |