


# K-DRG MANO HW G

Pressure regulators

**HANSA FLEX**

## Properties

<b>Input pressure</b>	Max. 10 bar
<b>Media temperature</b>	max. 70 °C
<b>Ambient temperature</b>	Max. 70 °C
<b>Control range</b>	0,5 - 9 bar
<b>Sealant</b>	NBR
<b>Spring bonnet</b>	POM
<b>Housing</b>	Die-cast aluminium
<b>Flow rate measurement</b>	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
<b>More information</b>	User manual on request

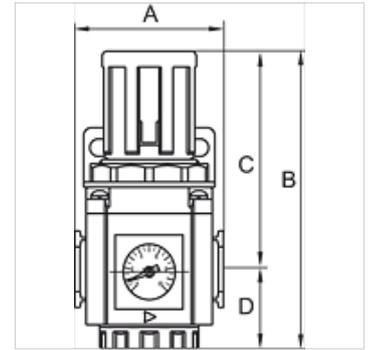

## Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	Size
K- 07 25 05 12	G 1/4	1650	51,0	112.5 mm	83,5	29,0	300
K- 07 25 05 13	G 3/8	2500	51,0	112.5 mm	83,5	29,0	300
K- 07 25 05 14	G 1/2	2500	51,0	112.5 mm	83,5	29,0	300
K- 07 25 05 15	G 3/8	4000	68,0	140.5 mm	104,0	36,5	400
K- 07 25 05 16	G 1/2	4000	68,0	140.5 mm	104,0	36,5	400
K- 07 25 05 17	G 3/4	12000	85,0	191.5 mm	141,5	50,0	600
K- 07 25 05 18	G 1	12000	85,0	191.5 mm	141,5	50,0	600

## Accessories

<b>K-VERSCHLEI-SATZ</b>	Set of wearing parts
<b>K-ERSATZMEMBRANE</b>	Replacement diaphragm
<b>K-ADAPTERPLATTEN HANSA</b>	Adapter plate HANSA
<b>K-HALTERBAUSATZ</b>	Holder
<b>K-VERBINDUNGSELEMENTE</b>	Connecting sets
<b>K-WANDHALTER</b>	Wall bracket