

# K-T-VB PP

## Union tees


### Properties

**Working pressure** on request

**Operating temperature** Max. +20 °C

**Material** Polypropylene (PP)

**Sealant** NBR

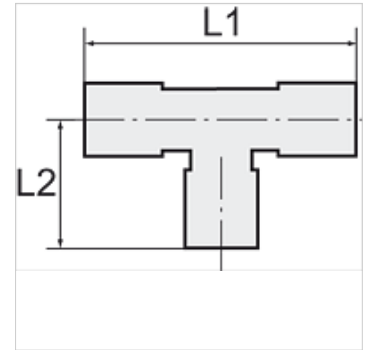

### Note

Further information on request

### Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

### Item

Identification	for external hose $\varnothing$	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7