


# K-XRD STECKANSCHLUSS

Straight non-return valves with plug connection



Properties	
Working pressure	Max. 10 bar, vacuum
Application	Air, vacuum
Recommended hoses	PU or PA (nylon)
Media	Compressed air
Temp. range	0 °C to +60 °C
Sealing surface	O-ring (NBR)
Material	Plastic, Nickel plated brass
Contact pressure ring	Plastic

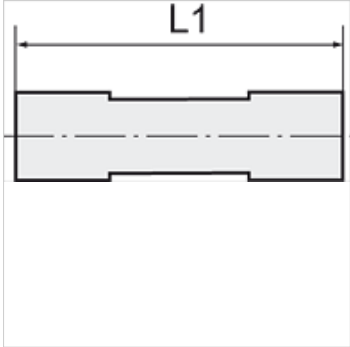

**Note**  
Further information on request

**Description**  
The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Item			
Identification	for external hose Ø	L1 (mm)	Opening pressure (bar)
K- 07 40 09 02	4 mm	47,0	0,2
K- 07 40 09 03	6 mm	46,0	0,2
K- 07 40 09 04	8 mm	51,0	0,2
K- 07 40 09 05	10 mm	62,0	0,2
K- 07 40 09 06	12 mm	64,0	0,2