

# K-XRD STECKANSCHLUSS

Straight non-return valves with plug connection

## Properties

**Working pressure** Max. 10 bar, vacuum

**Application** Air, vacuum

**Recommended hoses** PU or PA (nylon)


**Media** Compressed air

**Temp. range** 0 °C to +60 °C

**Sealing surface** O-ring (NBR)

**Material** Plastic, Nickel plated brass

**Contact pressure ring** Plastic

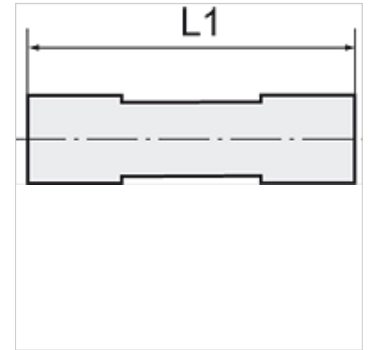

## Note

Further information on request

## Description

The non-return function of these push-in fittings prevents the air from flowing back. the unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Item

Identification	for external hose Ø	L1 (mm)	Opening pressure (bar)
K- 07 40 09 02	4 mm	47,0	0,2
K- 07 40 09 03	6 mm	46,0	0,2
K- 07 40 09 04	8 mm	51,0	0,2
K- 07 40 09 05	10 mm	62,0	0,2
K- 07 40 09 06	12 mm	64,0	0,2