



# K-STECKVERSCHR ABSP AGR OR

Straight stop valves, parallel male thread with O-ring

**HANSA FLEX**

## Properties

<b>Working pressure</b>	Max. 10 bar, vacuum
<b>Application</b>	Air, vacuum
<b>Recommended hoses</b>	PU or PA (nylon)
<b>Media</b>	Compressed air
<b>Standard</b>	G thread acc. to DIN EN ISO 228-1, with O-Ring
<b>Temp. range</b>	0 °C to +60 °C
<b>Sealing surface</b>	O-ring (NBR)
<b>Material</b>	Plastic, Nickel plated brass
<b>Contact pressure ring</b>	Plastic

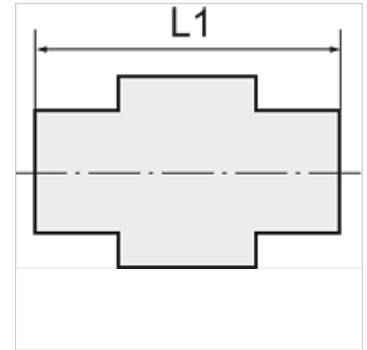

## Note

Further information on request

## Description

The air supply is completely shut off as soon as the hose is disconnected from the union. <br>The flow rate is only guaranteed if the hose is securely inserted.

Item	Identification	Thread	for external hose Ø	L1 (mm)	AF
	K- 07 40 08 18	G 1/8	4 mm	27,5	14 mm
	K- 07 40 08 19	G 1/8	6 mm	27,0	14 mm
	K- 07 40 08 20	G 1/8	8 mm	29,0	14 mm
	K- 07 40 08 16	G 1/4	6 mm	27,0	17 mm
	K- 07 40 08 17	G 1/4	8 mm	29,0	17 mm
	K- 07 40 08 15	G 1/4	10 mm	37,0	17 mm
	K- 07 40 08 23	G 3/8	8 mm	29,0	20 mm
	K- 07 40 08 21	G 3/8	10 mm	37,0	20 mm
	K- 07 40 08 22	G 3/8	12 mm	38,0	21 mm
	K- 07 40 08 13	G 1/2	10 mm	37,0	24 mm
	K- 07 40 08 14	G 1/2	12 mm	38,0	24 mm