


K-STECKVERSCHR ABSP AGR-K

Straight stop valves, conical male thread, coated

HANSA FLEX

Properties

Working pressure	Max. 10 bar, vacuum
Application	Air, vacuum
Recommended hoses	PU or PA (nylon)
Media	Compressed air
Standard	R thread acc. to ISO 7-1, thread coating
Temp. range	0 °C to +60 °C
Sealing surface	Conical version: thread coating
Material	Plastic, Nickel plated brass
Contact pressure ring	Plastic

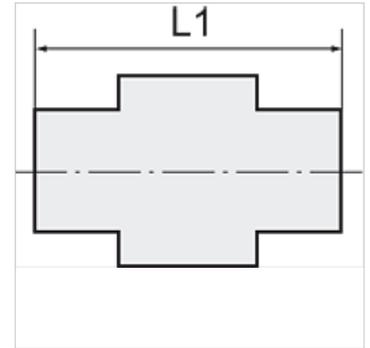

Note

Further information on request

Description

The air supply is completely shut off as soon as the hose is disconnected from the union.
The flow rate is only guaranteed if the hose is securely inserted.

Item	Identification	Thread	for external hose Ø	L1 (mm)	AF
	K- 07 40 08 29	R 1/8	4 mm	27,5	10 mm
	K- 07 40 08 30	R 1/8	6 mm	27,0	12 mm
	K- 07 40 08 31	R 1/8	8 mm	29,0	14 mm
	K- 07 40 08 27	R 1/4	6 mm	27,0	14 mm
	K- 07 40 08 28	R 1/4	8 mm	29,0	14 mm
	K- 07 40 08 26	R 1/4	10 mm	37,0	17 mm
	K- 07 40 08 32	R 3/8	10 mm	37,0	17 mm
	K- 07 40 08 33	R 3/8	12 mm	38,0	20 mm
	K- 07 40 08 34	R 3/8	8 mm	29,0	17 mm
	K- 07 40 08 24	R 1/2	10 mm	37,0	21 mm
	K- 07 40 08 25	R 1/2	12 mm	38,0	21 mm