

# K-UEM MS NI

Hexagonal swivel nuts - nickel plated brass

## Properties

| | |
|---|---|
| **Operating temperature** | Max. 150 °C |
| **Pressure** | Max. 60 bar |
| **Material** | Nickel-plated brass |



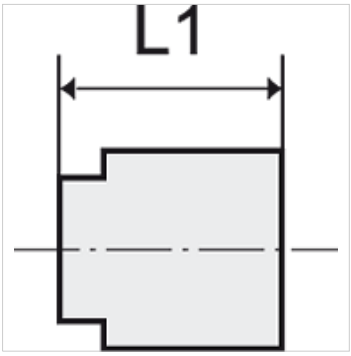


## Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

## Description

Suitable for air, water, oil, steam, etc.

## Additional information

Further types and dimensions on request.

## Item

| Identification | Thread | For fitting size | L1 (mm) | AF |
|---|---|---|---|---|
| **K- 07 40 44 22** | G 1/8 | I.D. 4, I.D. 6 | 13,0 | 14 mm |
| **K- 07 40 44 23** | G 1/4 | I.D. 4, I.D. 6 | 15,0 | 17 mm |
| **K- 07 40 44 24** | G 3/8 | I.D. 9 | 15,0 | 19 mm |
| **K- 07 40 44 25** | G 1/2 | I.D. 4, I.D. 6, I.D. 9 | 16,0 | 24 mm |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*