
K-WV 5/3 PNEU ZENTRUM ENTLUEFTET 4A

5/3-way pilot valve, mid-position exhausted

Properties

Operating pressure	1.5 - 8 bar
Temp. range	Up to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
Control air port	G 1/8
Valve body	Aluminium alloy



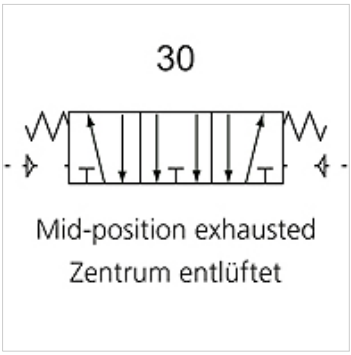

Note

Further information on request

Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number	Size
K- 07 15 04 28	M 5	M 5	250	30	100
K- 07 15 04 29	G 1/8	G 1/8	400	30	100
K- 07 15 04 30	G 1/8	G 1/8	550	30	200
K- 07 15 04 31	G 1/4	G 1/8	550	30	200
K- 07 15 04 32	G 1/4	G 1/4	950	30	300
K- 07 15 04 33	G 3/8	G 1/4	950	30	300
K- 07 15 04 34	G 1/2"	G 1/2	1600	30	400

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.