


# K-WV 5/3 PNEU ZENTRUM BELUEFTET 4A

5/3-way pilot valve, mid-position pressurised

**HANSA FLEX**

## Properties

Operating pressure	1.5 - 8 bar
Temp. range	Up to +70 °C
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar
Control air port	G 1/8
Valve body	Aluminium alloy

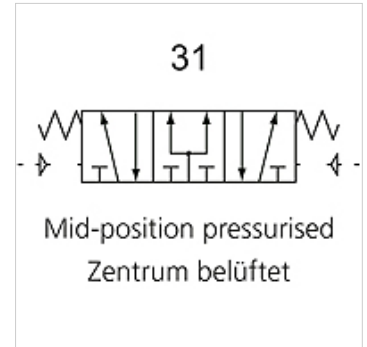

## Note

Further information on request

## Item

Identification	Connection	Vent port	Flow rate (L/min)	circuit diagram number	Size
K- 07 15 04 35	M 5	M 5	250	31	100
K- 07 15 04 36	G 1/8	G 1/8	400	31	100
K- 07 15 04 37	G 1/8	G 1/8	550	31	200
K- 07 15 04 38	G 1/4	G 1/8	550	31	200
K- 07 15 04 39	G 1/4	G 1/4	950	31	300
K- 07 15 04 40	G 3/8	G 1/4	950	31	300
K- 07 15 04 41	G 1/2"	G 1/2	1600	31	400